

3mm Round Standard LED

VT 3756.34

Description

The major breakthrough in VT 3756 series is Red color emit. The dice used in this series is AlGaInP rather than the conventional GaP and GaAsP/GaP in red diffuse lens. The advantages of AlGaInP are low power consumption and obtaining high luminous intensity under low current driving condition.



Applications

- Lighting indicator
- Status lights
- ON/OFF indicator
- Backlight illumination

RoHS



Electronic Optical Characteristics (at 20mA):

Part Number	Emitted Color	λ (nm)		Lens Color	Iv(mcd)		View Angle (2 θ 1/2)	VF(V)	
		λ_d	λ_p		Min.	Typ.		Typ.	Max.
VT 3756.34	Red 	624	632	Tinted	71	140	60	2.0	2.4

Absolute Maximum Ratings (at Ta=25°C)


P _D (mW)	I _{FP} (mA)	I _F (mA)	T _{sol} (°C)	I _R (uA)@V _R =5V	T _{opr} (°C)	T _{stg} (°C)
60	100*	25	260 ± 5 for 5 sec.	10	-40~+85	-40~+100

Note: Please take note the Absolute Maximum Rating values. Any operation beyond the specify ratings in this table will result degradation of LED life-span and may cause LED to fail.

* I_{FP}: Peak Forward Current under 1/10 duty, 1KHz condition

Package Dimension:

unit: mm

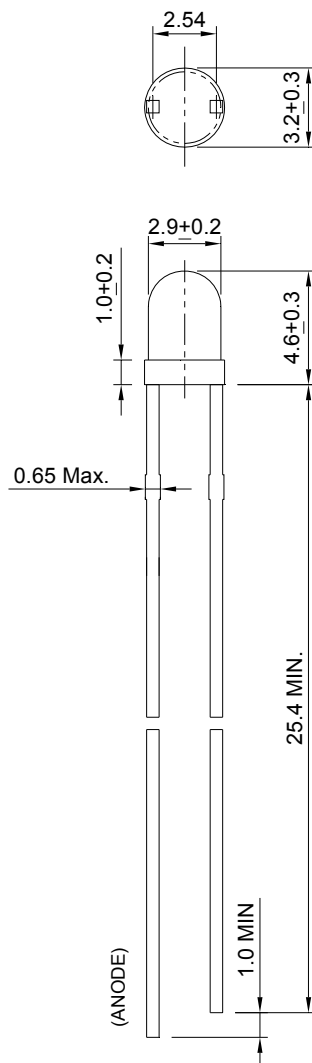

Notes:

1. All dimensions are millimeters.
2. Dimensional tolerance is $\pm 0.2\text{mm}$ unless otherwise specified.
3. Epoxy meniscus under flange is 1.5 mm max.
4. Specifications are subject to change without notice.