


PLCC-4 Package Bi-Color SMD LED

VR 4JD8.33


Description

The constructive of this series of LED are different from the PCB type SMT LED. The lead-frame is of metal, reflector is made of thermoplastic and construct into this unique type of SMD LED. The wavelengths and luminous Intensities of this series are grouped under 20mA for uniformity.



Applications

- Dashboards and switch
- Backlight keypads
- Industrial control systems signal indicator
- Automotive features
- Telephone and fax backlighting or indicator



Electronic Optical Characteristics (at 20mA):

Part Number	Emitted Color	λ (nm)		Iv(mcd)		VF(Volt)		View Angle (2 θ 1/2)	Lens
		λ_d	λ_p	Min	Typ.	Typ.	Max.		
VR 4JD8.33	Green 	573	575	45	90	2.0	2.4	120	Clear
	Red 	624	632	60	110	2.0	2.4		

Absolute Maximum Ratings (at Ta=25°C)


Emitted Color	P _D (mW)	I _F (mA)	I _{FP} (mA)	Iron Sol.(°C)	I _R (uA)@VR=5V	Topr(°C)	Tstg(°C)
Green	100	40	80 *	350 ± 5 for 3 sec.	10	-40~+85	-40~+95
Red	120	50	100 *		10	-40~+85	-40~+95

Note: Please take note the Absolute Maximum Rating values. Any operation beyond the specified ratings in this table will result degradation of LED life-span and may cause LED to fail.

. *I_{FP} = Peak Forward Current under 1/10 duty, 1KHz condition

Package Dimension:




unit:mm

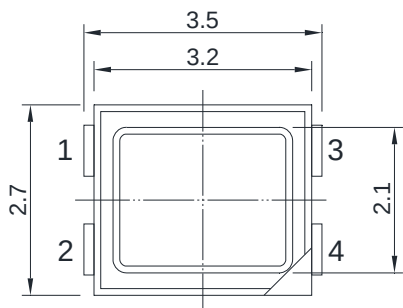


Green - 1  3 +

Red + 2  4 -

Polarity

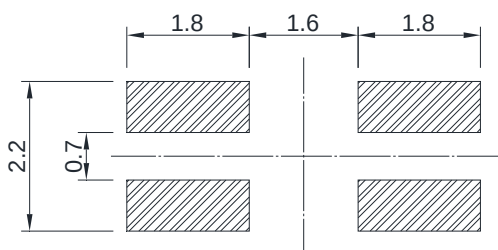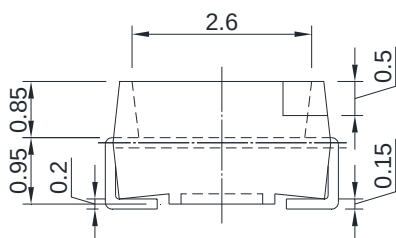






Recommended Soldering Pad




Notes:

1. All dimensions are millimeters.
2. Tolerance is $\pm 0.2\text{mm}$ unless otherwise specified.
3. Specifications are subject to change without notice.

Optical Characteristics Curves

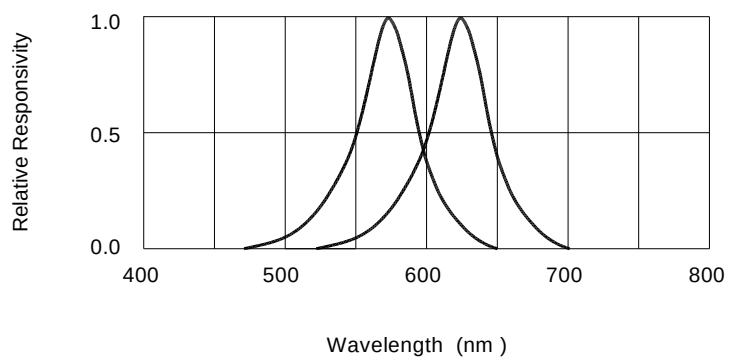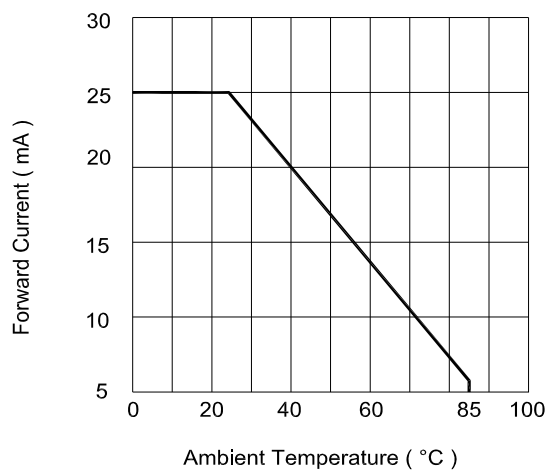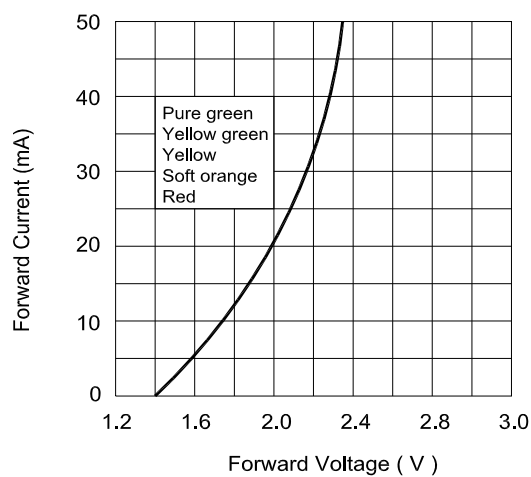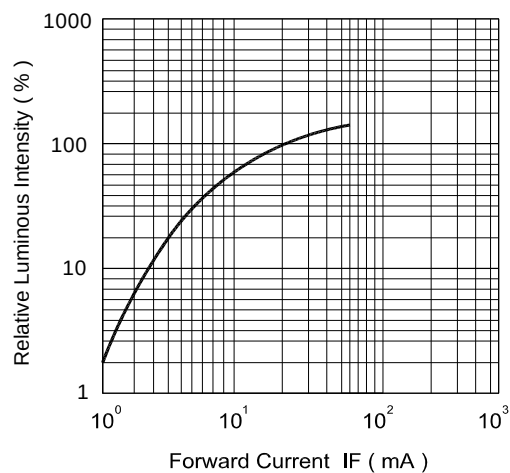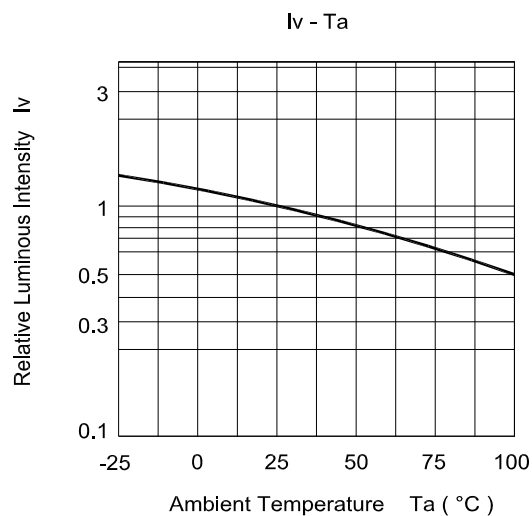


Reel Dimension:

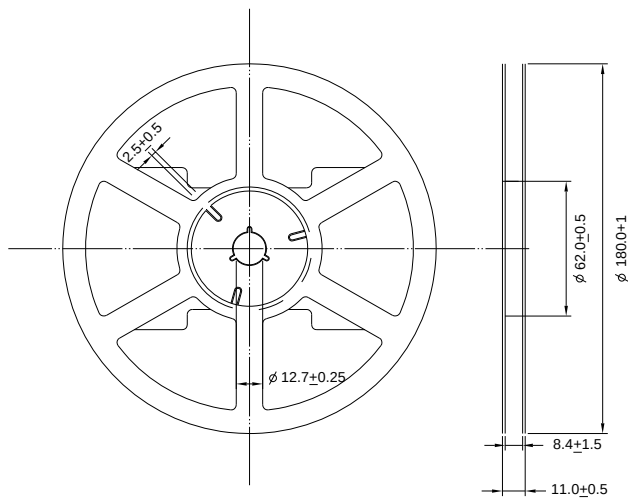

Note:

Available in 8mm carrier tape on 178mm diameter reels. (2000 pieces)

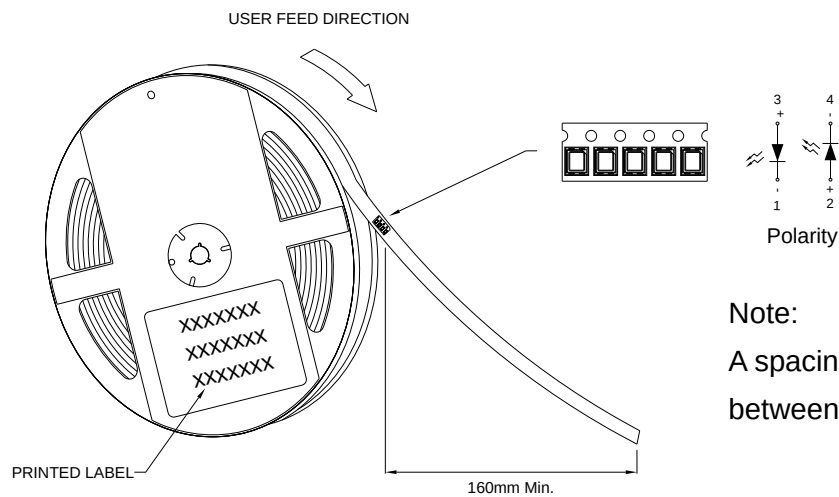


Note:


A spacing of approximately 160mm between the front edge of tape

Tape Dimension:


unit:mm

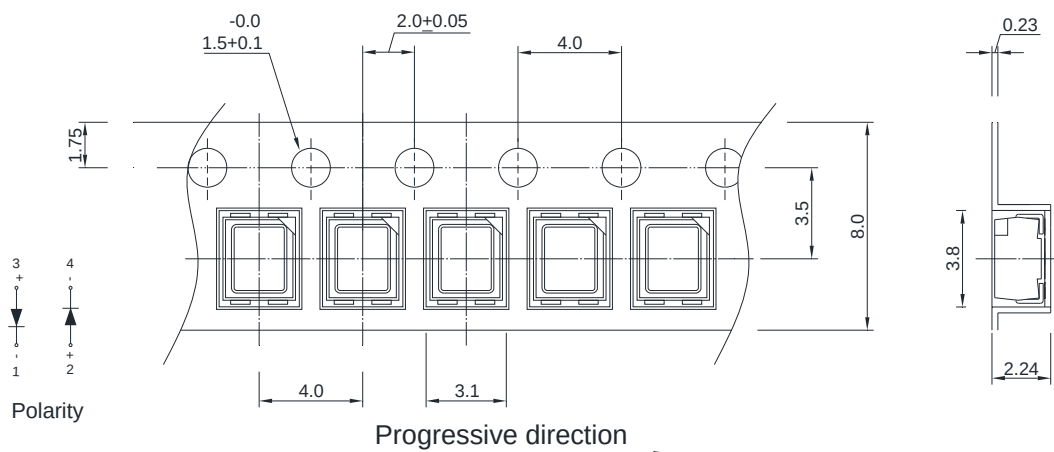

Recommended re-flow soldering profile:

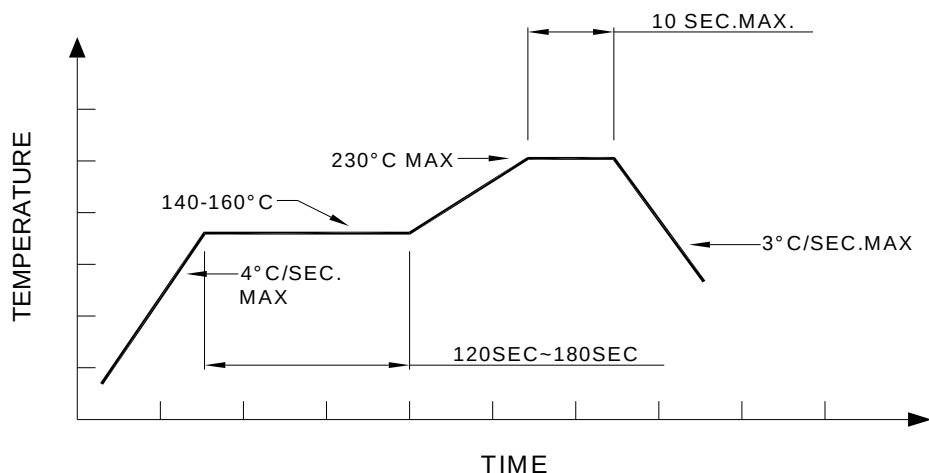

Recommended Pb-free re-flow soldering profile:

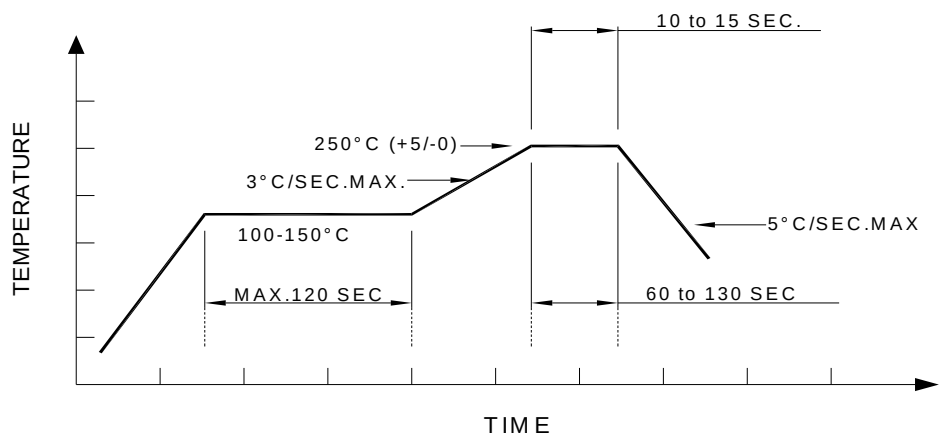

Note:

All the specifications listed in this data sheet are suitable for general electronic equipment, office equipment and communication devices. Kindly consult Sales Representatives for specific reliabilities request, Forward Voltage, Luminous Intensity, Wavelength, Radiant Power or Viewing Angle.