


5.0 x 5.0mm Package SMD LED

VR K2A85

Description

The constructive of this series of LED are different from the PCB type SMD LED. The lead-frame is of metal, reflector is made of thermoplastic and construct into this unique type of SMD LED. Such construction is very suitable to be used in high demanding reliability applications such as in-car dashboard or telecommunications.




Features

- High reliability LED package
- Available in full selection of colors
- Package in 8mm carrier tape on 7 inch reel.
- Luminous and color categorized for each reel.
- Super wide viewing at 120°

RoHS



Electronic Optical Characteristics (at 20mA per chip x 3):

Part Number	Emitted Color	λ (nm)		Lens Color	Iv(mcd)		View Angle (2 θ 1/2)	VF(V)	
		λ_d	λ_p		Min.	Max.		Typ.	Max.
VR K2A85	Blue 	470	468	Clear	1000	1500	120	3.2	3.4

Absolute Maximum Ratings (at Ta=25°C)


P _D (mW)	I _{FP} (mA)	I _F (mA)	Soldering Temp(°C)	I _R (uA)@V _R =5V	T _{opr} (°C)	T _{stg} (°C)
200	100*	60	260± 5 for 5 sec.	50	-40~+85	-40~+100

Note: Please take note the Absolute Maximum Rating values. Any operation beyond the specified ratings in this table will result degradation of LED life- span and may cause LED to fail.




* I_{FP}: Peak Forward Current under 1/10 duty, 1KHz condition

Package Dimension:


unit:mm



Polarity









Recommended Soldering Pad




Notes:

1. All dimensions are millimeters.
2. Tolerance is $\pm 0.2\text{mm}$ unless otherwise specified.
3. Specifications are subject to change without notice.


Optical Characteristics Curves

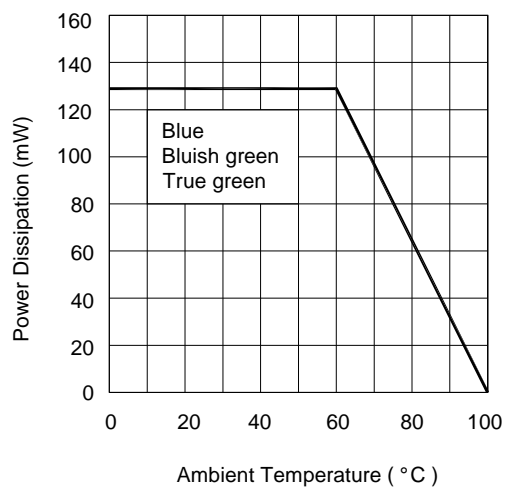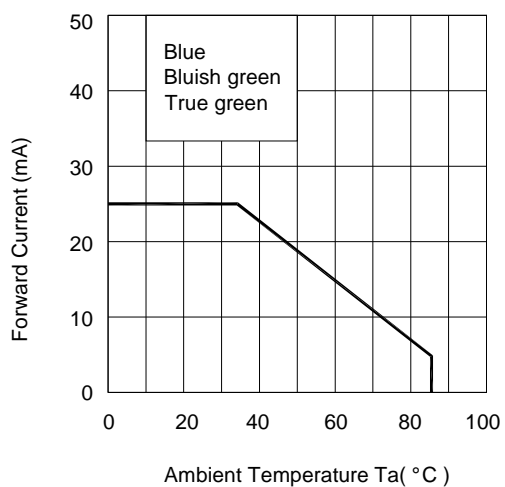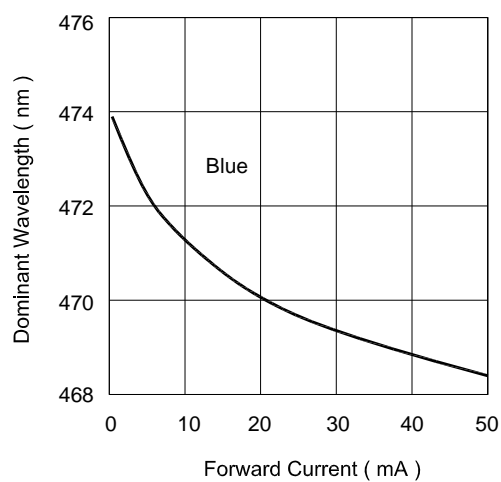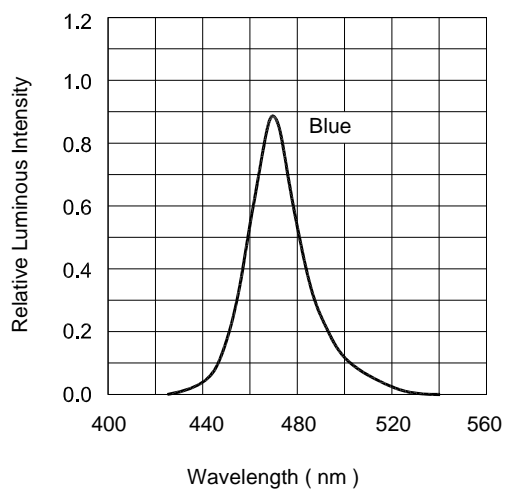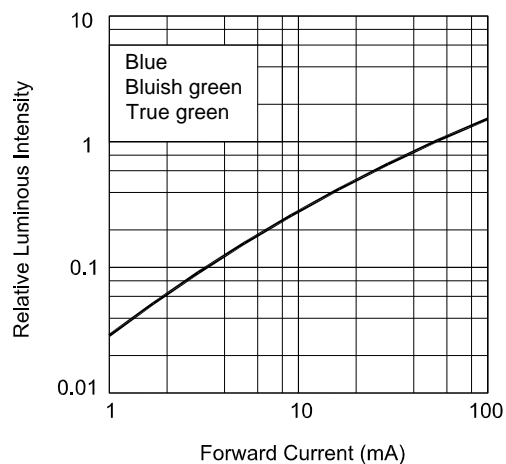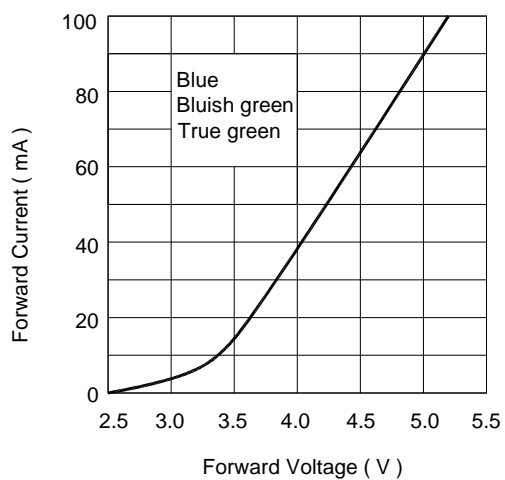

Recommended re-flow soldering profile:

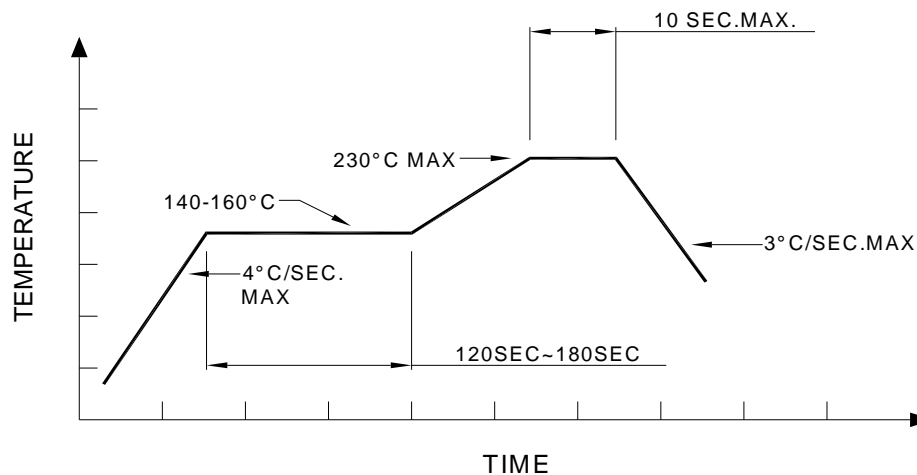

Recommended Pb-free re-flow soldering profile:

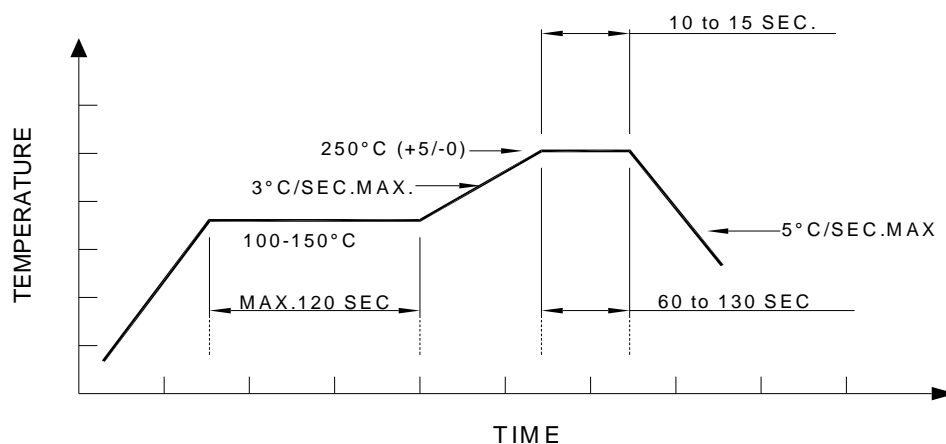

Note:

All the specifications listed in this data sheet are suitable for general electronic equipment, office equipment and communication devices. Kindly consult Sales Representatives for specific reliabilities request, Forward Voltage, Luminous Intensity, Wavelength, Radiant Power or Viewing Angle.