


0.30" Triple Digit Display C.C.

VP CO3CB

Main Features:

- Low power consumption
- High efficiency GaAlAs material
- Excellent character appearance
- Long life solid safe reliability
- Industry standard pin out
- Common Cathode configuration
- Black surface reflector with white diffuse segments



Applications

- Industry equipment
- Instruments panels
- Counter equipment



Electronic Optical Characteristics (at 10mA):

Part Number	Emitted Color	λ (nm)		Surface Color	Iv(mcd)		VF(V)	
		λ_d	λ_p		Min.	Typ.	Typ.	Max.
VP CO3CB	Red 	643	660	Black	14	40	1.9	2.3

Absolute Maximum Ratings (at Ta=25°C)


P _D (mW)	I _{FP} (mA)	I _F (mA)	T _{sol} (°C)	I _r (uA)@V _R =5V	T _{opr} (°C)	T _{stg} (°C)
50	160*	25	260±5	10	-40~+85	-40~+100

Note: Please take note the Absolute Maximum Rating values. Any operation beyond the specified ratings in this table will result degradation of LED life-span and may cause LED to fail.

*I_{FP} = Peak Forward Current under 1/10 duty, 1KHz condition

Package Dimension:

unit: mm

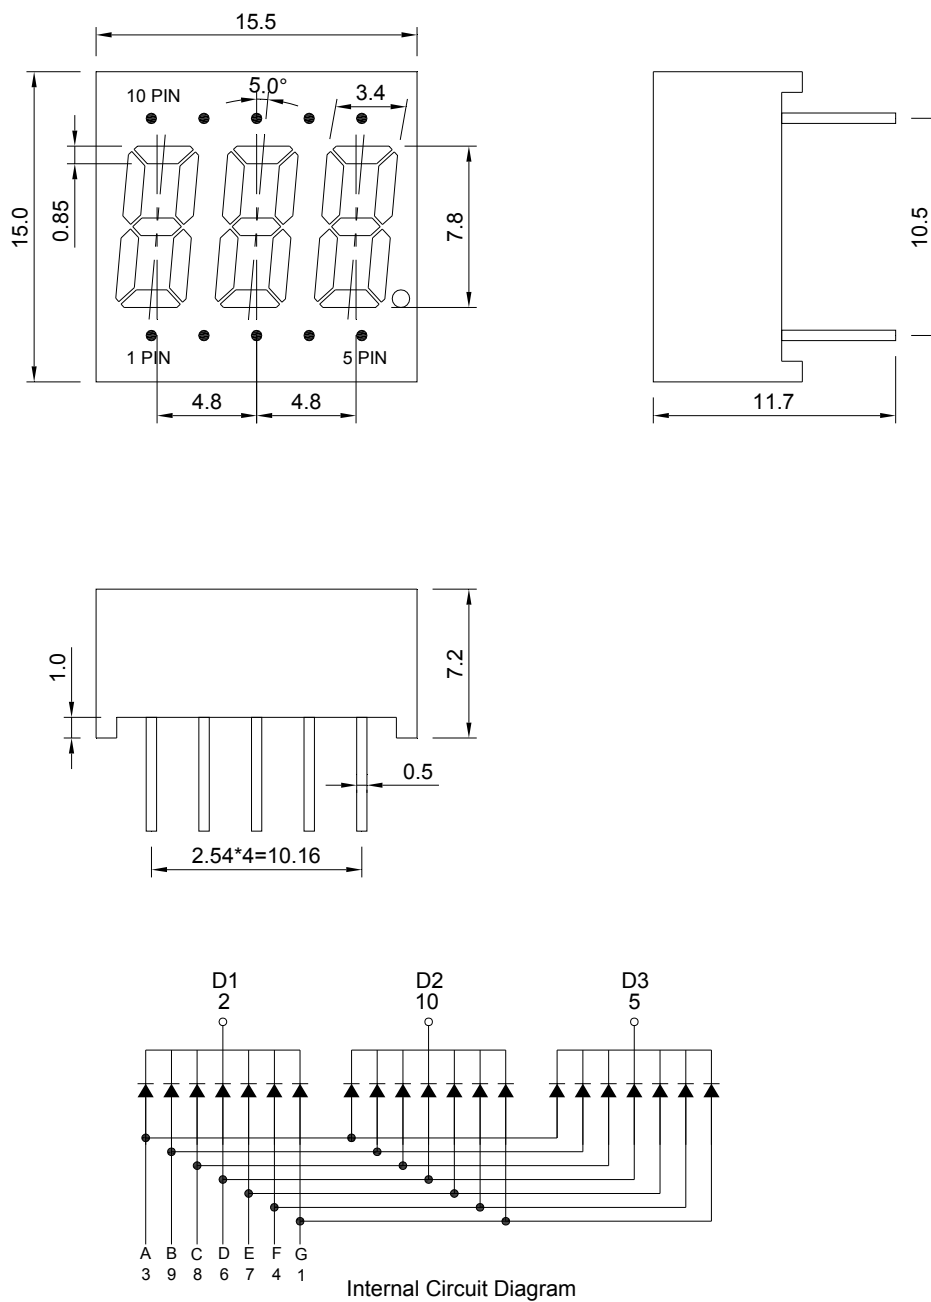

Notes:

1. All dimensions are millimeters.
2. Dimensional tolerance is +/- 0.2mm unless otherwise specified.
3. Specifications are subject to change without notice.