


1210 Package Inner Lens Bi-Color LED

VS L7378

Description

This is Bi-Color SMD LED series with dimension 3.0 mm (L) * 2.5 mm (W) * 1.5 mm (H). The unique of these LEDs are made from AlGaInP chips that provide high luminous intensity at low driving current. The lens design provides 60 degree viewing angle and suitable for backlighting purpose. The available colors are BLUE/YELLOW, YELLOW GREEN/RED or even RED/BLUE. Any color combinations specified by customers can be accepted.



RoHS



Applications

- Industrial control systems signal indicator
- Automotive features
- Front panel indicator
- Status indication

Electronic Optical Characteristics (at 20mA):

Part Number	Emitted Color	λ (nm)		Iv(mcd)		VF(Volt)		View Angle	Lens
		λ_d	λ_p	Min	Max.	Typ.	Max.		
VS L7378	Red 	624	632	280	710	2.0	2.4	60	Clear
	True-green 	518	525	450	1120	2.0	2.4		

Absolute Maximum Ratings (at Ta=25°C)


Emitted Color	P _D (mW)	I _F (mA)	I _{FP} (mA)	I _R (uA) @ VR=5V	Topr (°C)	Tstg (°C)
True-green (525nm)	110	25	160 *	50	-40~+85	-40~+90
Red (624nm)	60	25	160 *	10	-40~+85	-40~+90

Note: Please take note the Absolute Maximum Rating values. Any operation beyond the specified ratings in this table will result degradation of LED life- span and may cause LED to fail.

* I_{FP} = Peak Forward Current under 1/10 duty, 1KHz condition

Package Dimension:






unit:mm

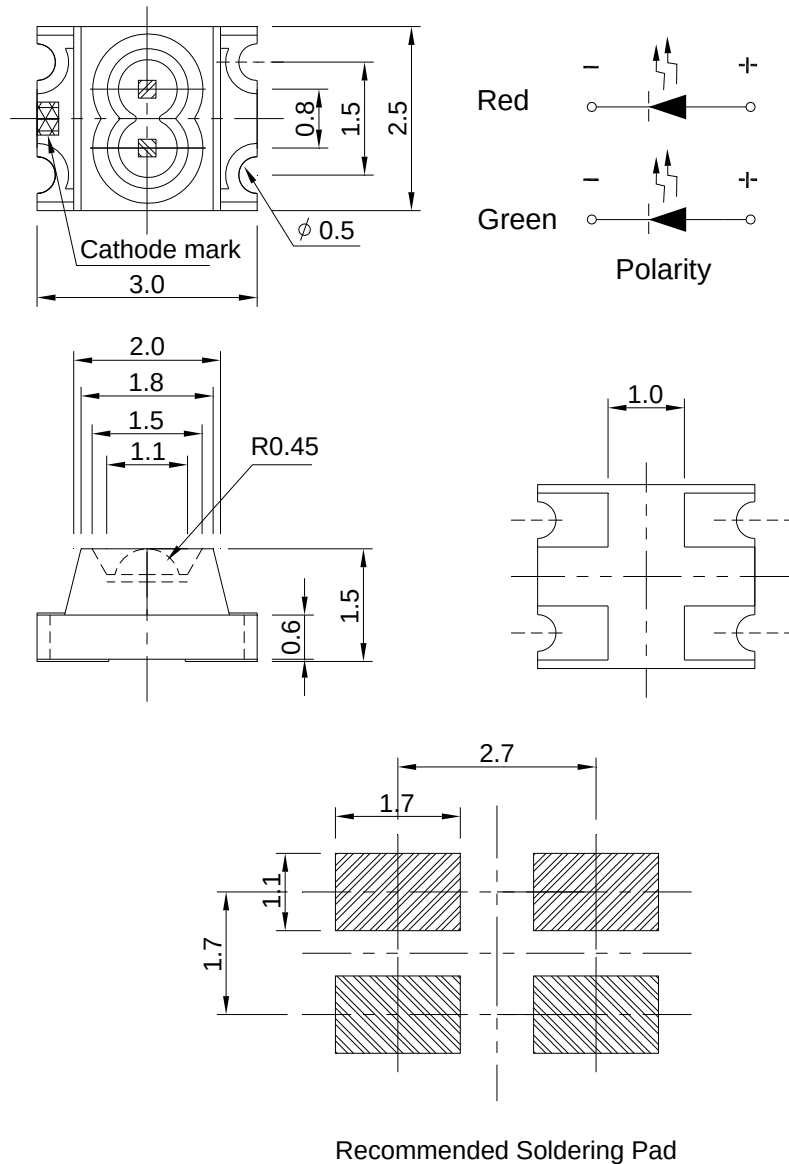


Notes:

1. All dimensions are millimeters.
2. Tolerance is ± 0.2 mm unless otherwise specified
3. Specifications are subject to change without notice.


Optical Characteristics Curves

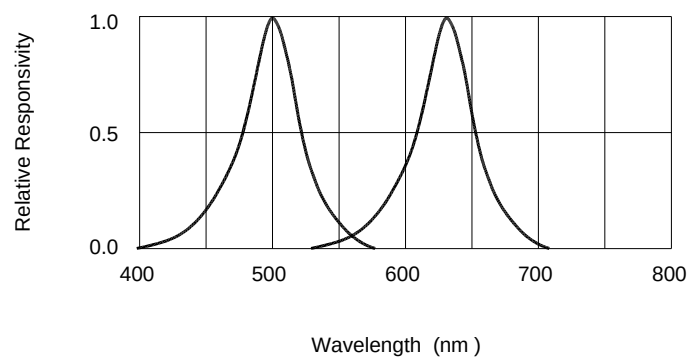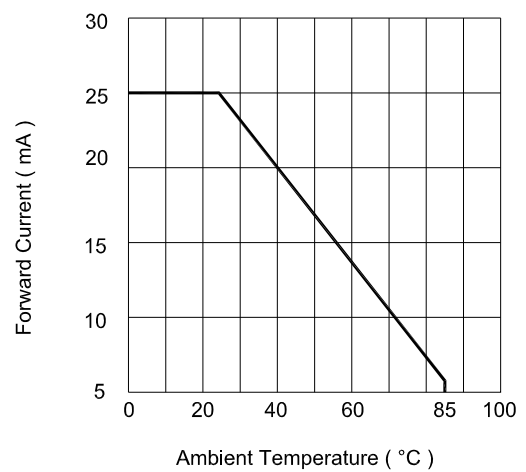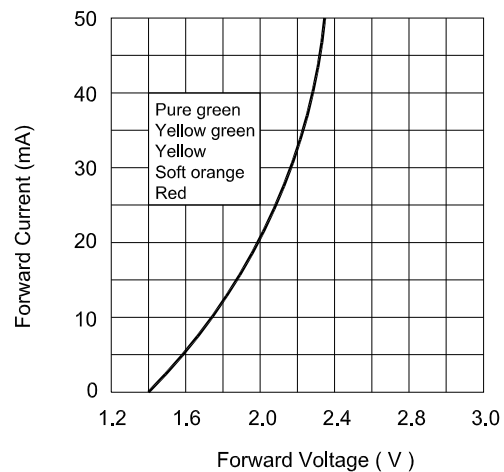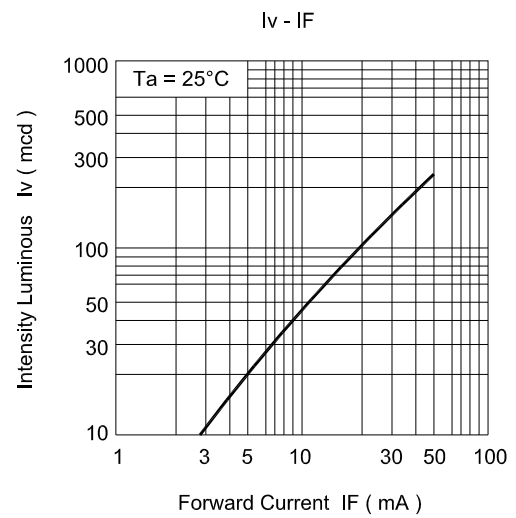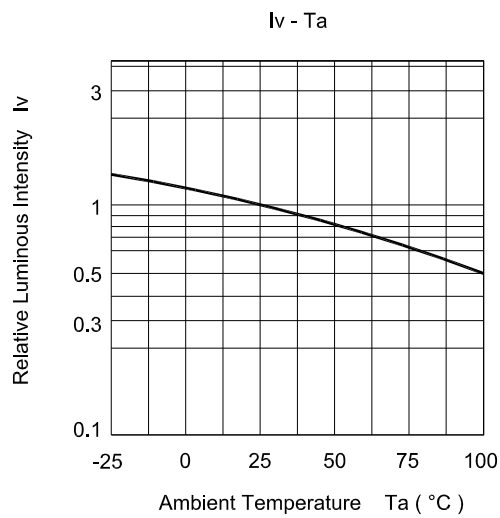

Recommended re-flow soldering profile:

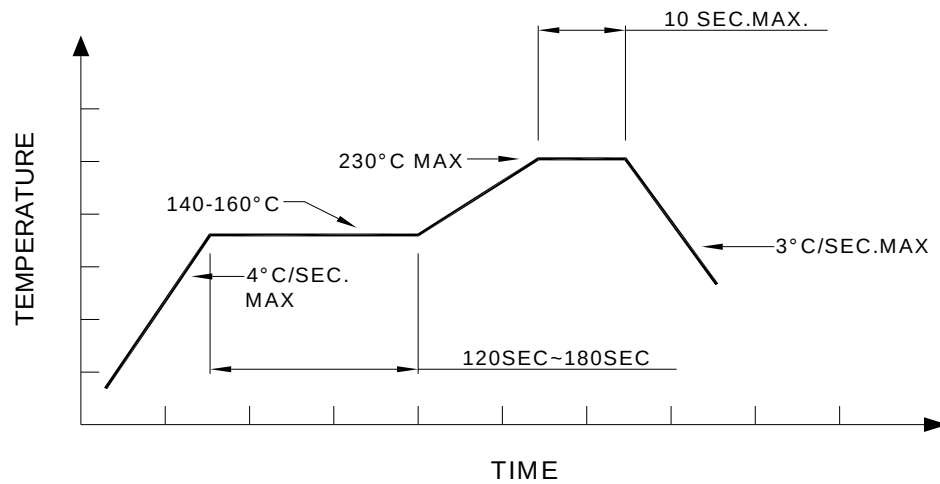

Recommended Pb-free re-flow soldering profile:

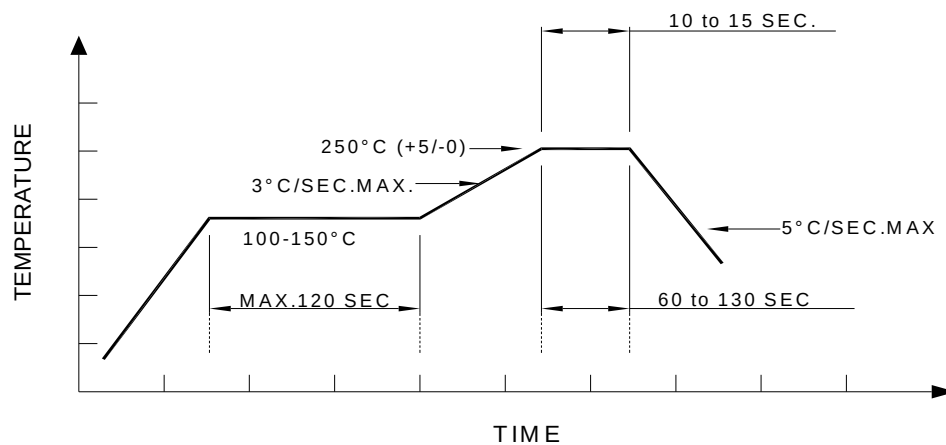

Note:

All the specifications listed in this data sheet are suitable for general electronic equipment, office equipment and communication devices. Kindly consult Sales Representatives for specific reliabilities request, Forward Voltage, Luminous Intensity, Wavelength, Radiant Power or Viewing Angle.