


4.0 X 4.0 mm Side Emitting LED

VR 23D8

Description

The major breakthrough in VR 23D8 series is True-green color emitted package in 4.0 * 4.0 * 3.6mm dimension side look SMD LED. The dice used in this series is InGaN material. The advantages of InGaN are low power consumption and obtaining high luminous intensity under low current driving condition.




Applications

- Backlighting applications
- Automotive features
- Status indication
- Conventional light bulbs or fluorescent lamps



Electronic Optical Characteristics (at 20mA):

Part Number	Emitted Color	λ (nm)		Lens Color	Iv(mcd)		View Angle (2 θ 1/2)	VF(V)	
		λ d	λ p		Min.	Typ.		Min.	Max
VR 23D8	True-green 	525	518	Clear	280	510	120	2.8	4.0


Absolute Maximum Ratings (at Ta=25°C)

P _D (mW)	I _{FP} (mA)	I _F (mA)	Iron Sol.(°C)	I _R (μ A)@V _R =5V	T _{opr} (°C)	T _{stg} (°C)
95	100*	30	350 \pm 5 for 3 sec	50	-40~+85	-40+100

Note: Please take note the Absolute Maximum Rating values. Any operation beyond the specified ratings in this table will result degradation of LED life- span and may cause LED to fail.

* I_{FP}: Peak Forward Current under 1/10 duty, 1KHz condition







Package Dimension:

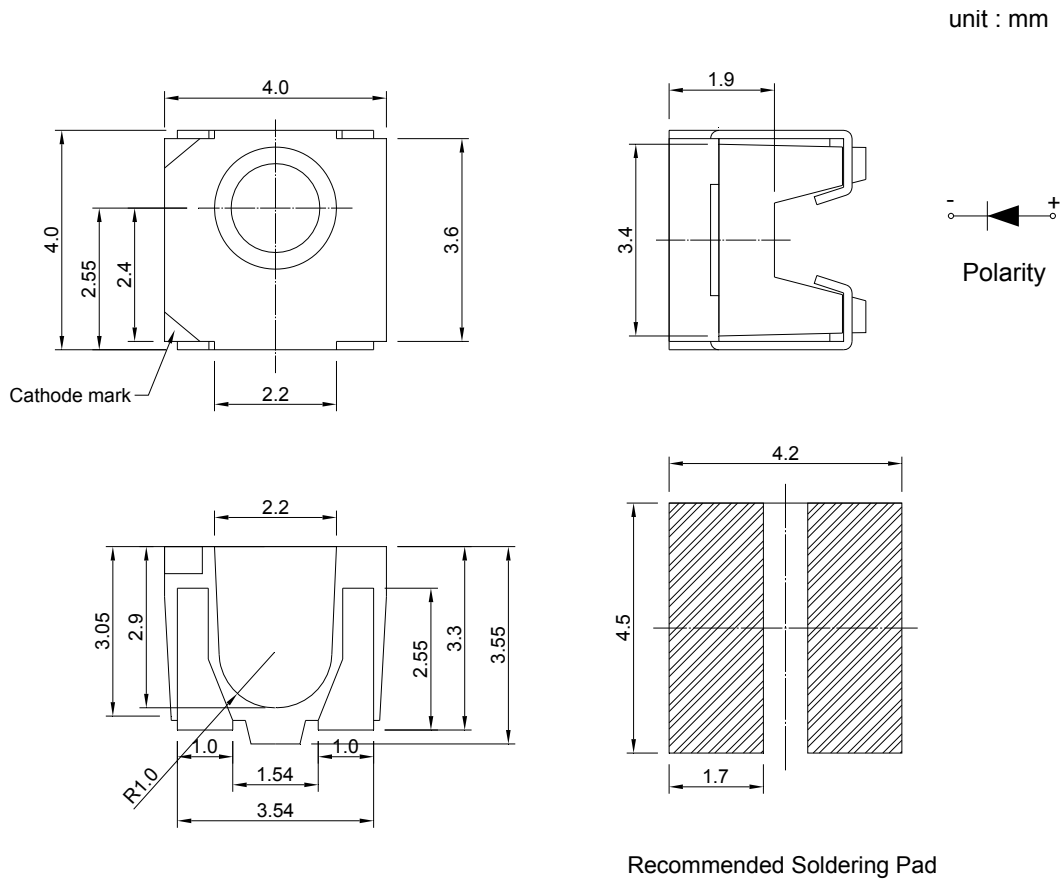

Notes:


1. All dimensions are millimeters.
2. Tolerance is $\pm 0.2\text{mm}$ unless otherwise specified.
3. Specifications are subject to change without notice.

Optical Characteristics Curves

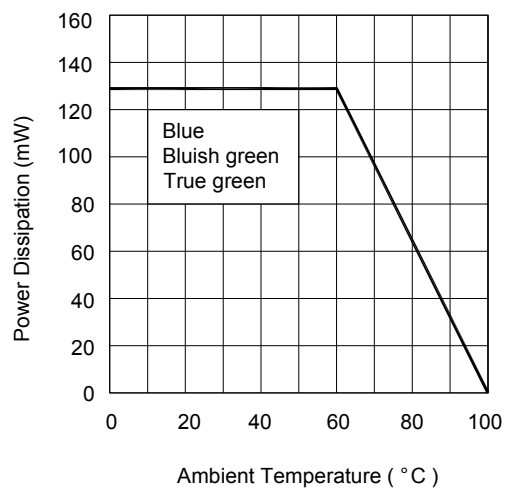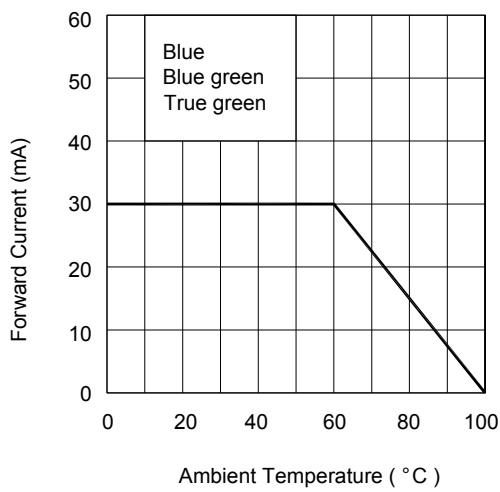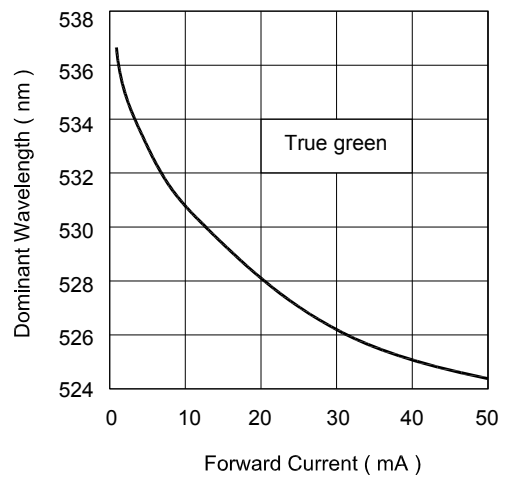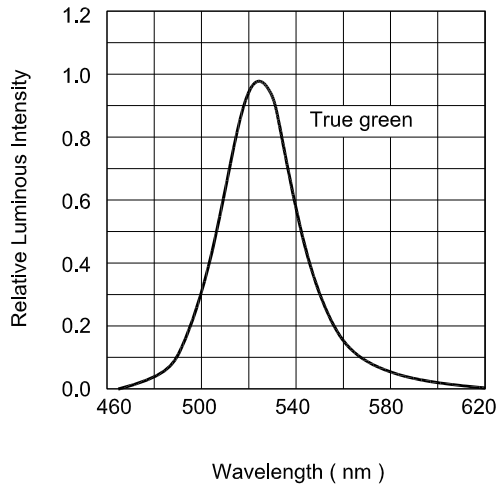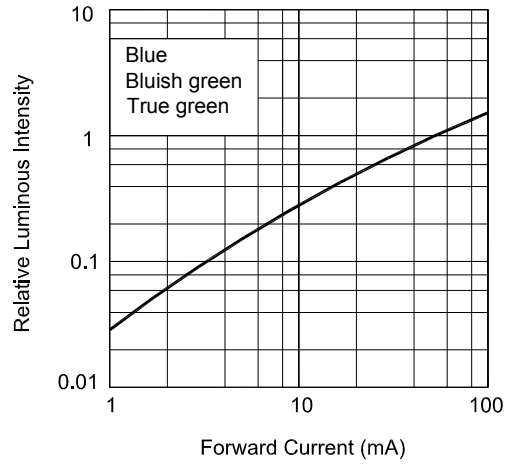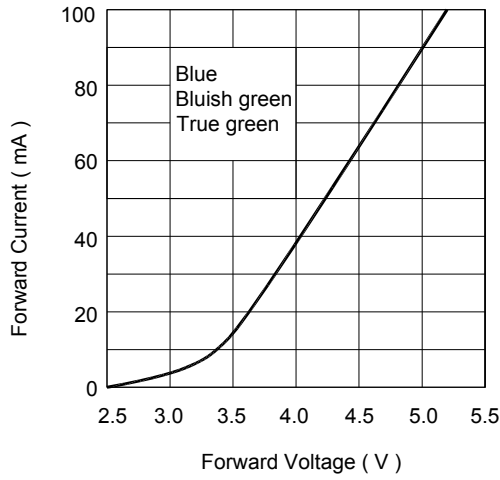

Reel Dimension:


unit : mm

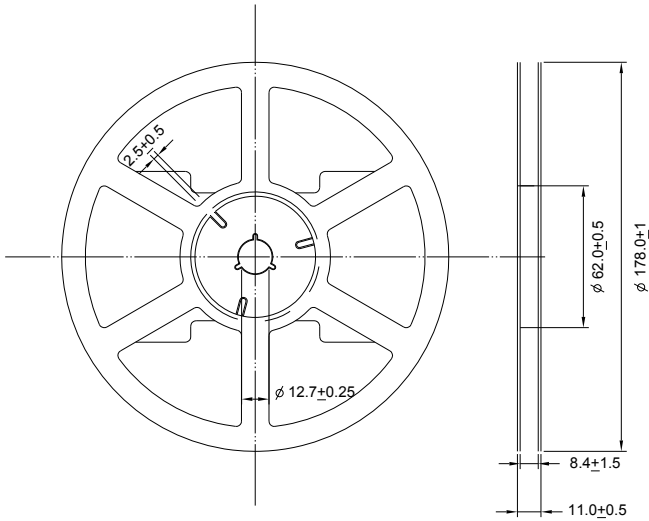

Note:

Available in 8mm carrier tape on 178mm diameter reels. (800 pieces)

USER FEED DIRECTION

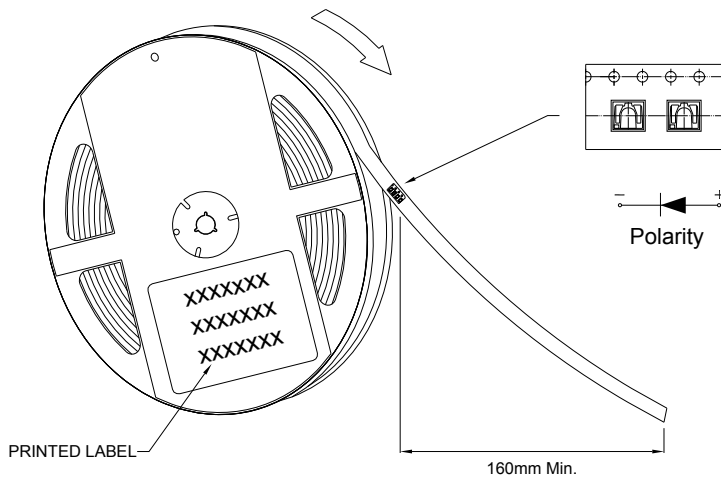


Note:


A spacing of approximately 160mm between the front edge of tape

Tape Dimension:


unit:mm

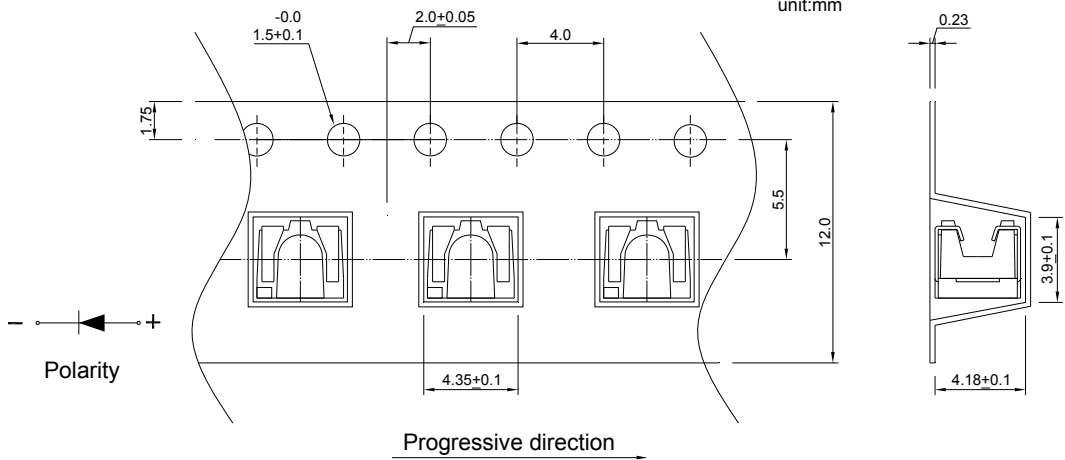

Recommended re-flow soldering profile:

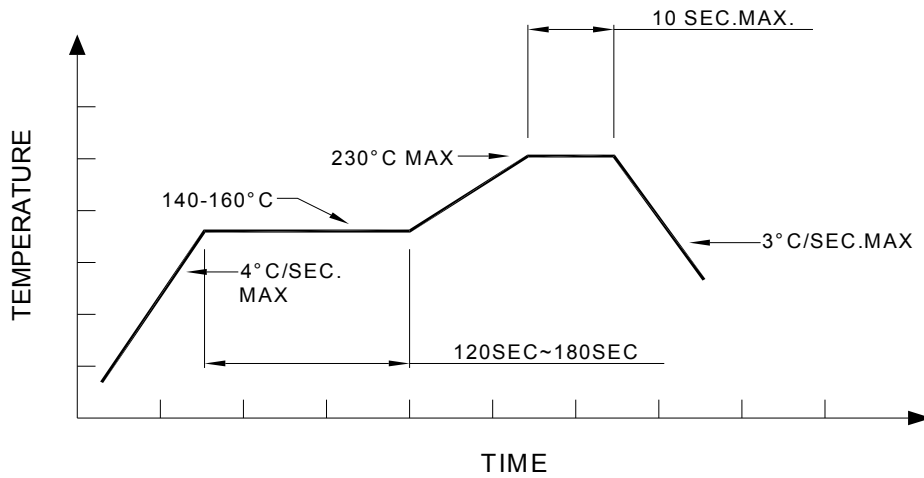

Recommended Pb-free re-flow soldering profile:

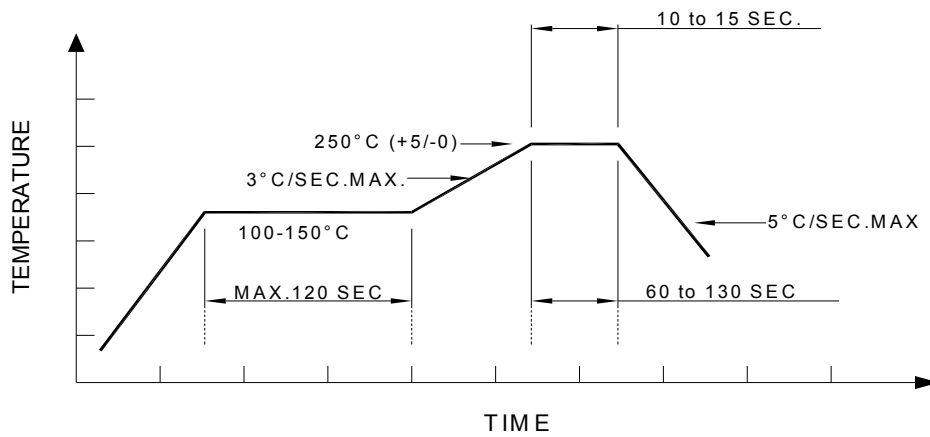

Note:

All the specifications listed in this data sheet are suitable for general electronic equipment, office equipment and communication devices. Kindly consult Sales Representatives for specific reliabilities request, Forward Voltage, Luminous Intensity, Wavelength, Radiant Power or Viewing Angle.