


1916 Package Bi-Color SMD LED

VS R65F8

Description

This is Bi-Color SMT LED series with dimension 1.9 mm (L) * 1.6 mm (W) * 0.8 mm (H). The unique of these LEDs are made from AlGaInP chips that provide high luminous intensity at low driving current. The lens design provides 130 degree viewing angle and suitable for backlighting purpose. The available colors are Blue/True green, Yellow/Red or even Red/Blue. Any color combinations specified by customers can be accepted.



Applications

- Industrial control systems signal indicator
- Automotive features
- Front panel indicator
- Status indication



Electronic Optical Characteristics (at 20mA):

Part Number	Color	λ (nm)		Iv(mcd)		VF(Volt)		View Angle	Lens
		λ_d	λ_p	Min.	Typ.	Typ	Max.		
VS R65F8	Yellow 	589	591	14	35.5	2.0	2.4	130	Clear
	green 	573	575	9	14	2.0	2.4		

Absolute Maximum Ratings (at Ta=25°C)






Emitted Color	P _D (mW)	I _F (mA)	I _{FP} (mA)	I _R (uA)@VR=5V	Topr (°C)	Tstg (°C)
Yellow	60	25	60 *	10	-40~+85	-40~+90
Green	60	25	60 *	10	-40~+85	-40~+90

Note: Please take note the Absolute Maximum Rating values. Any operation beyond the specify ratings in this table will result degradation of LED life- span and may cause LED to fail.

* I_{FP} = Peak Forward Current under 1/10 duty, 1KHz condition

Package Dimension:

unit:mm

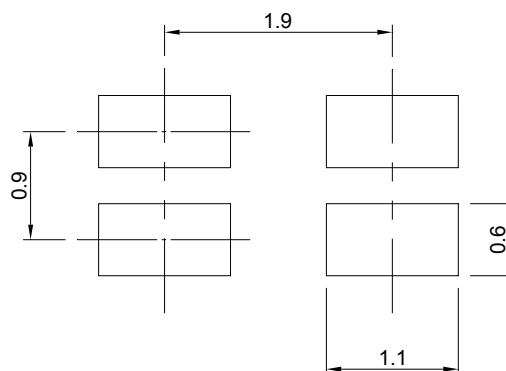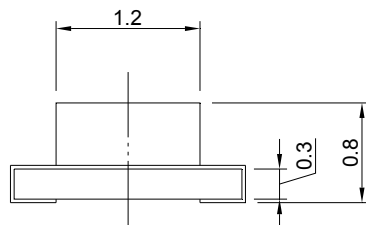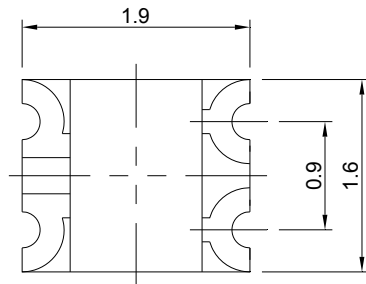


Recommended Soldering Pad


Notes:

1. All dimensions are millimeters.
2. Tolerance is $\pm 0.2\text{mm}$ unless otherwise specified.
3. Specifications are subject to change without notice.


Optical Characteristics Curves

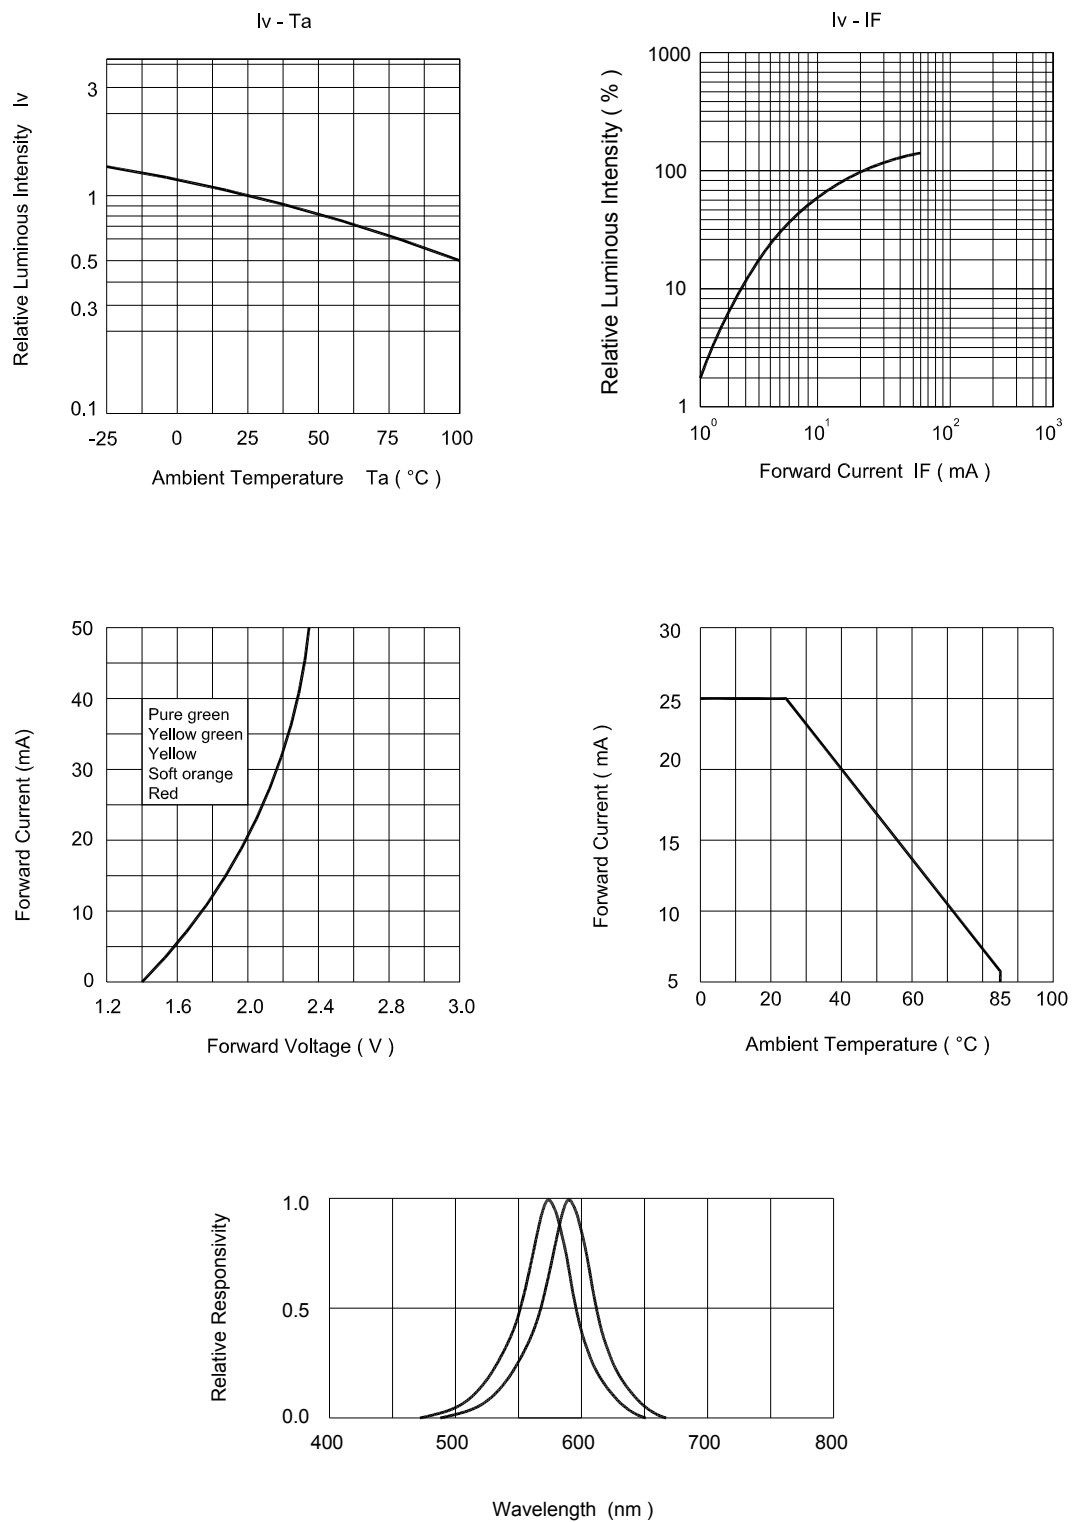

Recommended re-flow soldering profile:

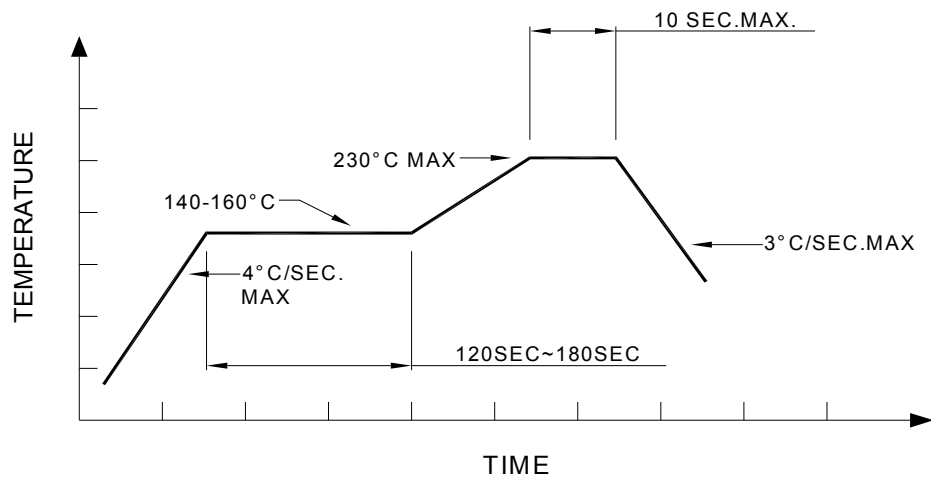

Recommended Pb-free re-flow soldering profile:

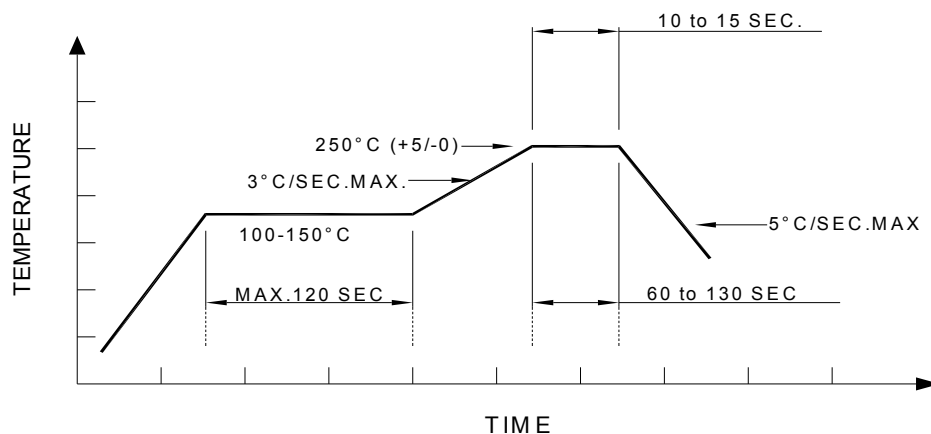

Note:

All the specifications listed in this data sheet are suitable for general electronic equipment, office equipment and communication devices. Kindly consult Sales Representatives for specific reliabilities request, Forward Voltage, Luminous Intensity, Wavelength, Radiant Power or Viewing Angle.