

## Super Flux LED 120 View Angle

### VT 66D8

#### Description

The series of LED is known as 'Super Flux' LED, able to withstand high drive current application. With special design Lead-Frame, the heat dissipation capability is increased. During high operating forward current, the luminous intensity is increase tremendously. As such, the overall cost is reduced with less number of LED being used. These LED can be used as traffic single light, signal board or in full color applications.



#### Features

- High luminous flux output
- Supreme heat dissipation
- Package in tubes for automatic insertion
- Luminous and color categorized for each tube
- RoHS compliance



#### Electronic Optical Characteristics (at 70mA):

| Part Number | Emitted Color                                                                              | $\lambda$ (nm) |             | Lens Color | Flux(mlm) |      | View Angle (2 $\theta$ 1/2) | VF(V) |      |
|-------------|--------------------------------------------------------------------------------------------|----------------|-------------|------------|-----------|------|-----------------------------|-------|------|
|             |                                                                                            | $\lambda_d$    | $\lambda_p$ |            | Min.      | Typ. |                             | Typ.  | Max. |
| VT 66D8     | Yellow  | 589            | 591         | Clear      | 3600      | 5650 | 120                         | 2.6   | 3.1  |

#### Absolute Maximum Ratings (at Ta=25°C)





| P <sub>D</sub> (mW) | I <sub>FP</sub> (mA) | I <sub>F</sub> (mA) | T <sub>sol</sub> (°C) | I <sub>R</sub> ( $\mu$ A)@V <sub>R</sub> =5V | T <sub>opr</sub> (°C) | T <sub>stg</sub> (°C) |
|---------------------|----------------------|---------------------|-----------------------|----------------------------------------------|-----------------------|-----------------------|
| 220                 | 160*                 | 70                  | 260 $\pm$ 5 for 5 sec | 10                                           | -40~+85               | -40+100               |

Note: Please take note the Absolute Maximum Rating values. Any operation beyond the specified ratings in this table will result degradation of LED life-span and may cause LED to fail.

\* I<sub>FP</sub>: Peak Forward Current under 1/10 duty, 1KHz condition

## Package Dimension:

unit:mm

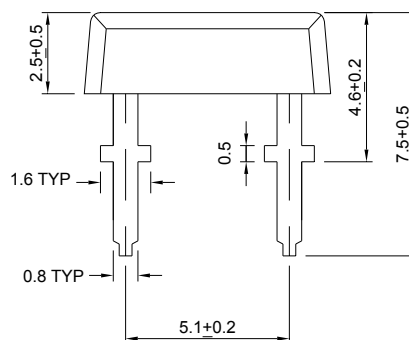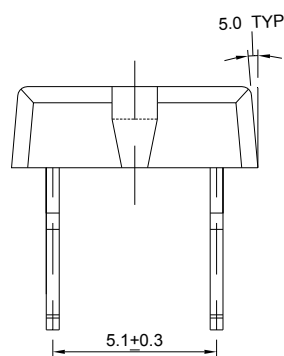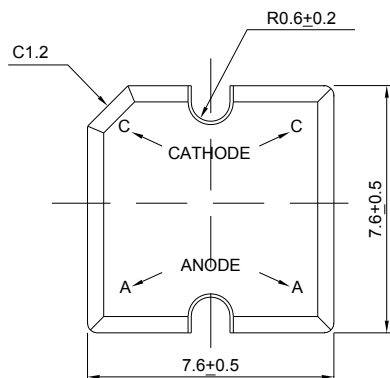

## Notes:

1. All dimensions are millimeters.
2. Dimensional tolerance is  $\pm 0.2$  mm unless otherwise specified.
3. Epoxy meniscus under flange is 1.5 mm max.
4. Specifications are subject to change without notice.