

3mm Round Ultra Bright LED

Description

This high brightness TRUE GREEN emitting LEDs are made from the most efficient InGaN technology. Its chip material is of InGaN technology, able to reach a high light output efficiency. These series of LEDs come in moisture resistance water clear lens while offering various viewing angles. Other than Bulk packing, tape and reel is available. Changes in viewing angle, luminous intensity and lens color is acceptable.

Applications

- Lighting indicator
- Status lights
- ON/OFF indicator

VT 3338.47







Electronic Optical Characteristics (at 20mA):

Part Number	Emitted Color	λ (nm)		Lens	lv(mcd)		View Angle	VF(V)	
Part Number		λd	λр	Color	Min.	Тур.	(201/2)	Тур.	Max.
VT 3338.47	True-green	525	518	Clear	1400	3250	20	3.5	4.0

Absolute Maximum Ratings at Ta=25[°]C

P _D (mW)	IFP(mA)	IF(mA)	Tsol(℃)	IR(uA)@V _{R=} 5V	Topr(℃)	Tstg(℃)	
110	100*	25	260 ± 5 for 5 sec.	50	-40~+85	-40~+100	


Note: Please take note the Absolute Maximum Rating values. Any operation beyond the specified ratings in this table will result degradation of LED life-span and may cause LED to fail.


Version:1.1 Spec: VT 3338.47 Page 1 of 2



Package Dimension:

unit: mm



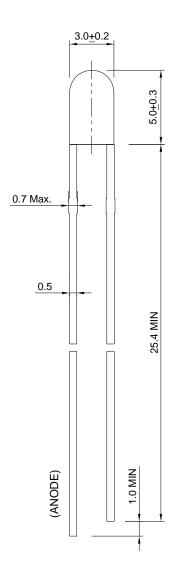

Notes:

- 1. All dimensions are millimeters.
- 2. Dimensional tolerance is +/- 0.2mm unless otherwise specified.
- 3. Epoxy meniscus under flange is 1.5 mm max.
- 4. Specifications are subject to change without notice.

Version:1.1 Spec: VT 3338.47 Page 2 of 2