


1206 Inner Lens Package 875nm Infrared LED

US 65D8


Description

The US 65D8 is used high efficiency 875nm GaAlAs materials, molded into 1206 inner lens package with clear lens. Comparing conventional GaAs/GaAs technology under similar wavelength, GaAlAs offers much higher radiant power. The viewing angle being offered is 60 degree.



Applications

- Opto-Electronic switch
- Infrared remote control unit
- Free air transmission system
- Infrared applied system



Electronic Optical Characteristics (at 20mA):

Part Number	λ (nm)		Lens Color	mW/sr		View Angle (2 θ 1/2)	VF(V)	
	λ_p	$\Delta\lambda$		Min.	Typ.		Typ.	Max.
US 45C8	875	80	Water Clear	1.0	1.3	60	1.2	1.6

* Radiant Intensity Typ. 7.0 mW/sr @ IF=100mA, tp=100u sec, tp/T=0.01, VF @ 1.80 Max.


Absolute Maximum Ratings (at Ta=25°C)

Parameter	Symbol	Rating	Unit	Condition
Continuous Forward Current	IF	60	mA	---
Peak Forward Current	IP	1.0	A	Pulse Width=100us Duty Cycle = 1%
Soldering Temperature	Tsol	260	°C	3 sec
Storage Temperature	Tstg	-40 - +85	°C	---
Operating Temperature	Topr	-25 - +85	°C	---
Power Dissipation	PD	150	mW	25°C Free Air Temperature

Note: Please take note the Absolute Maximum Rating values. Any operation beyond the specified ratings in this table will result degradation of LED life- span and may cause LED to fail.

Package Dimension:







unit:mm

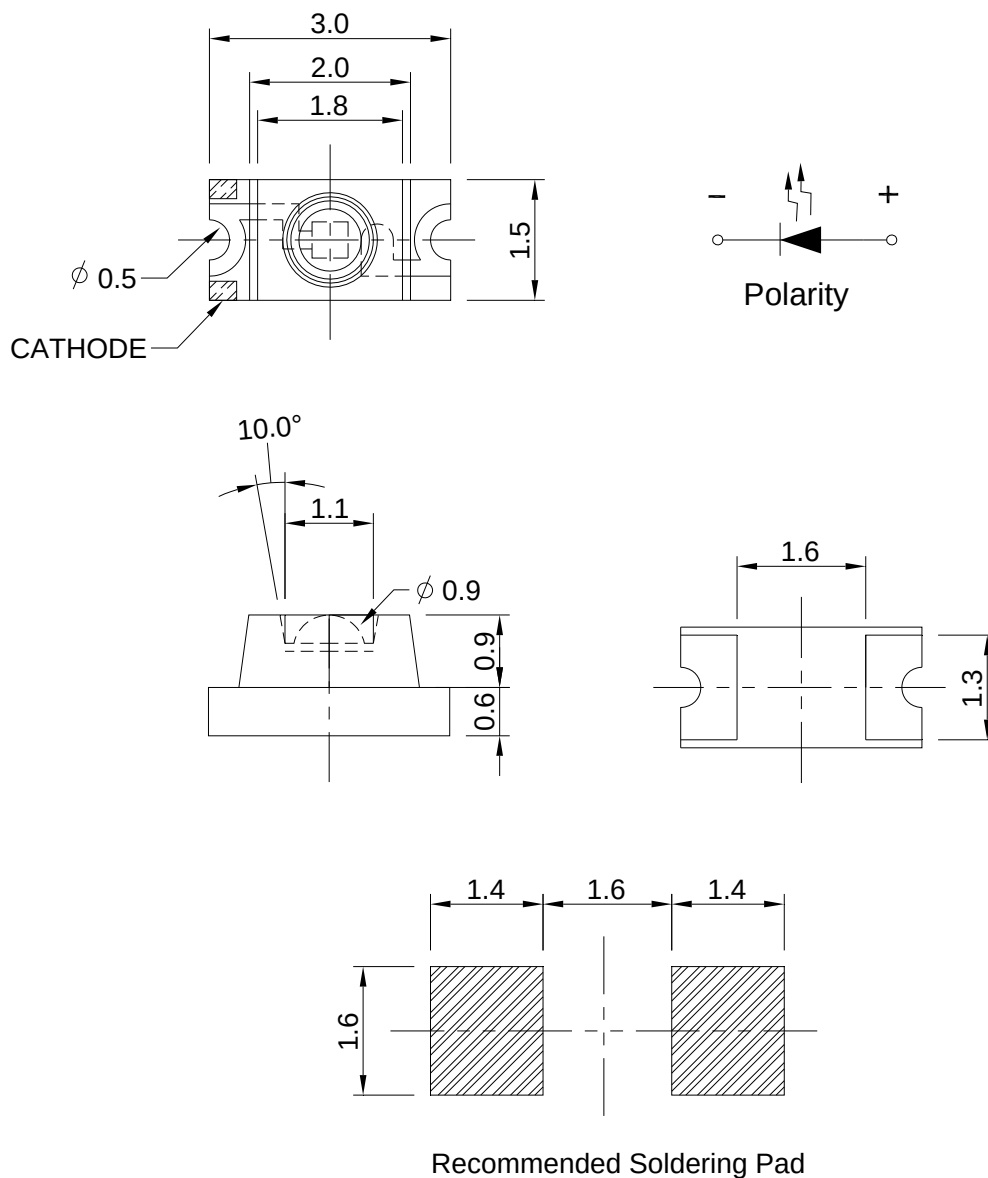


Notes:

1. All dimensions are millimeters.
2. Tolerance is $\pm 0.2\text{mm}$ unless otherwise specified.
3. Specifications are subject to change without notice.

Optical Characteristics Curves

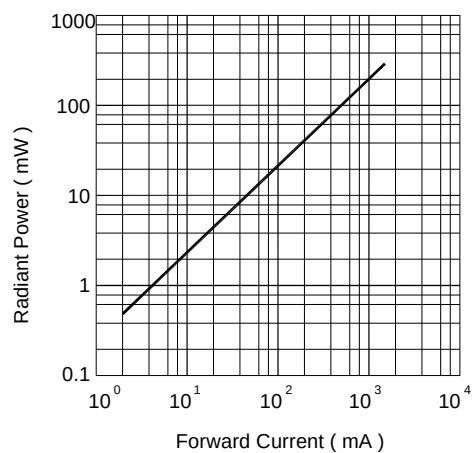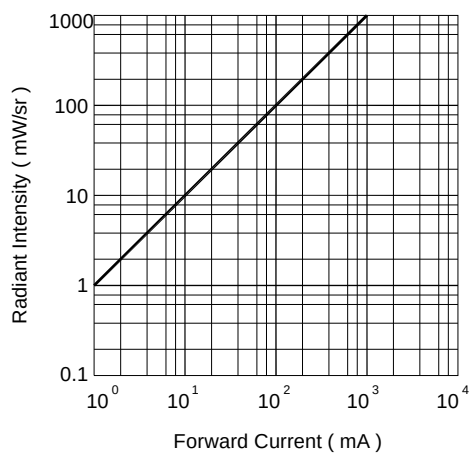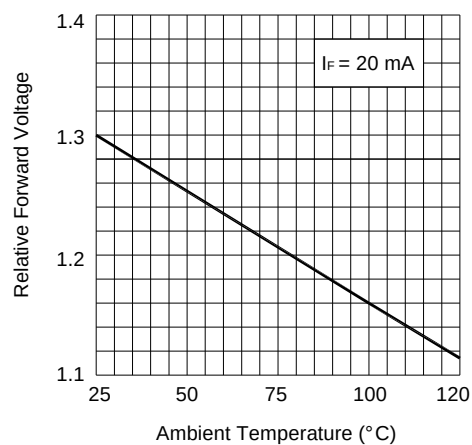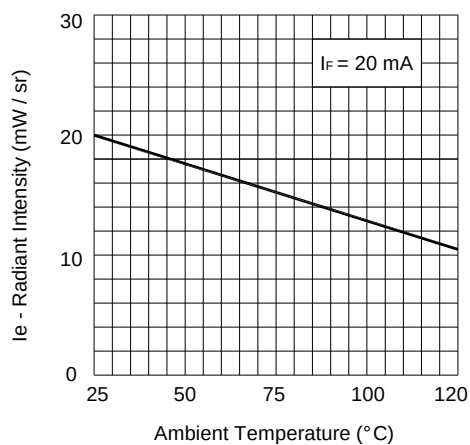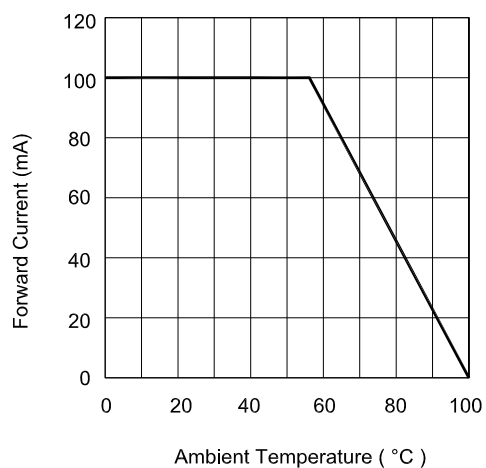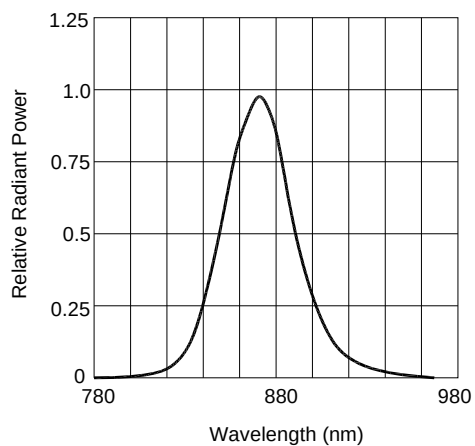


Reel Dimension:

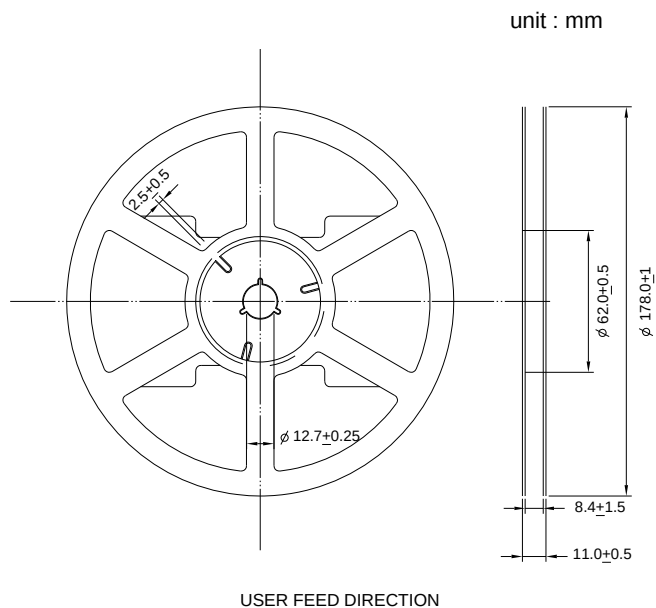

Note:


Available in 8mm carrier tape on 178mm diameter reels. (2000 pieces)

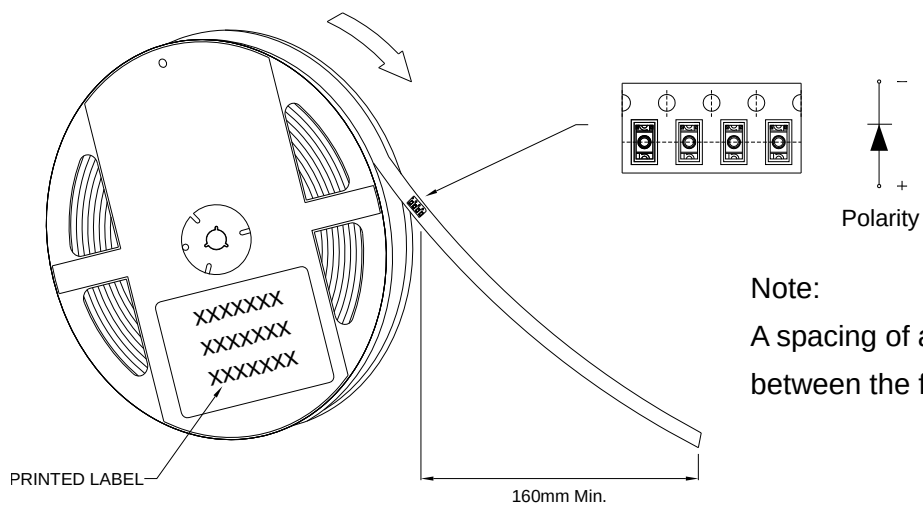


Note:

A spacing of approximately 160mm between the front edge of tape

Tape Dimension:

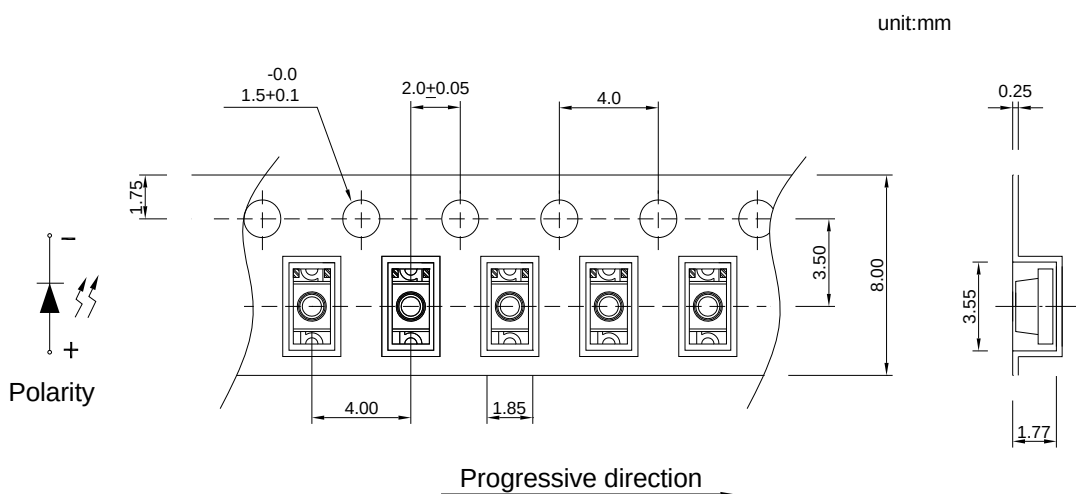

Recommended re-flow soldering profile:

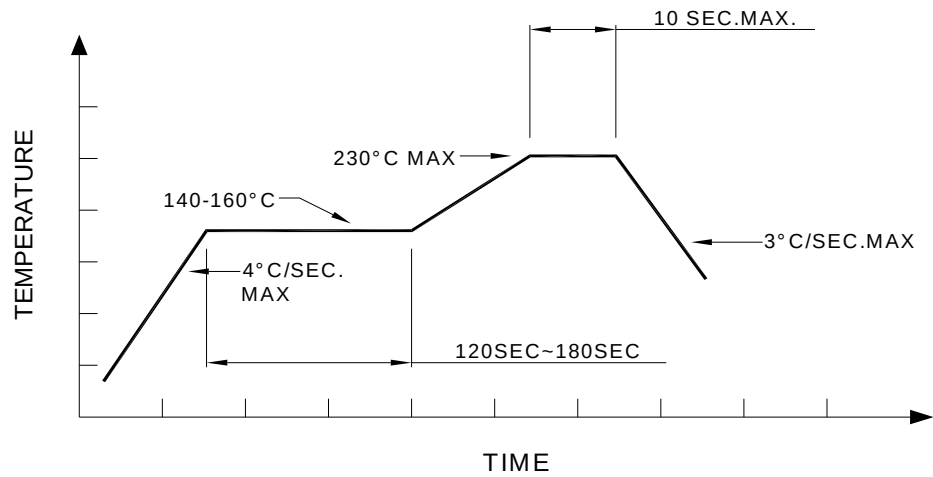

Recommended Pb-free re-flow soldering profile:

