

8mm Round Super Bright LED

Description

This high brightness Blue emitting LED are made from the most efficient InGaN technology. Its chip material is of InGaN technology, able to reach a high light output efficiency. These series of LED come in moisture resistance water clear lens while offering various viewing angles. Other than bulk packing, tape and reel is available. Changes in viewing angle, luminous intensity and lens color is acceptable.

VT 8248.43



Applications

- Lighting indicator
- Status lights
- ON/OFF indicator
- Backlight illumination





Electronic Optical Characteristics (at 20mA):

Dout Number	Emitted Color	lv(nm)		Lens	lv(mcd)		View Angle	VF(V)	
Part Number	Emitted Color	λd	λр	Color	Min.	Тур.	(201/2)	Тур.	Max.
VT 8248.43	Blue	470	468	Clear	560	1250	30	3.5	3.8

Absolute Maximum Ratings (at Ta=25℃)

P _D (mW)	IFP(mA)	IF(mA)	Tsol(℃)	IR(uA)@V _{R=} 5V	Topr(℃)	Tstg(℃)	
120	100*	25	260 ± 5 for 5 sec.	50	-40~+85	-40~+100	

Note: Please take note the Absolute Maximum Rating values. Any operation beyond the specify ratings in this table will result degradation of LED life-span and may cause LED to fail.


*IFP: Peak Forward Current under 1/10 duty, 1KHz condition


Version:1.1 Spec: VT 8248.43 Page 1 of 2



Package Dimension:

unit: mm



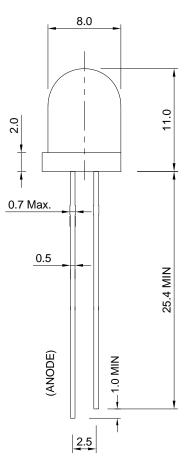

Notes:

- 1. All dimensions are millimeters.
- 2. Dimensional tolerance is +/- 0.2mm unless otherwise specified.
- 3. Epoxy meniscus under flange is 1.5 mm max.
- 4. Specifications are subject to change without notice.

Version:1.1 Spec: VT 8248.43 Page 2 of 2