


## 0.40" Quadruple Digit Display C.A.

### VP 774AG-B

#### Main Features:

- Low Power Consumption
- High Efficiency Chips Material
- Excellent Character Appearance
- Long Life Solid State Reliability
- Common Anode configuration
- Gray color surface reflector with white diffuse segments

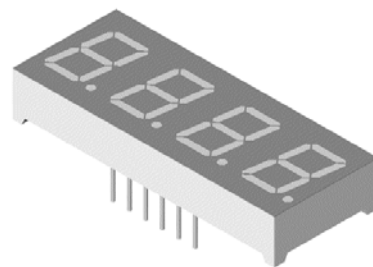

#### Applications

- Industry equipment
- Instruments panels
- Counter equipment

RoHS



#### Electronic Optical Characteristics (@ 10mA):


| Part Number | Emitted Color                                                                           | $\lambda$ (nm) |             | Surface Color | Iv(mcd) |      | VF(V) |      |
|-------------|-----------------------------------------------------------------------------------------|----------------|-------------|---------------|---------|------|-------|------|
|             |                                                                                         | $\lambda_d$    | $\lambda_p$ |               | Min.    | Typ. | Typ.  | Max. |
| VP 774AG-B  | Red  | 624            | 632         | Gray          | 4.5     | 9.0  | 2.0   | 2.4  |

#### Absolute Maximum Ratings (@ Ta=25°C)

| P <sub>D</sub> (mW) | I <sub>FP</sub> (mA) | I <sub>F</sub> (mA) | T <sub>sol</sub> (°C) | I <sub>R</sub> (uA)@V <sub>R</sub> =5V | Topr(°C) | Tstg(°C) |
|---------------------|----------------------|---------------------|-----------------------|----------------------------------------|----------|----------|
| 60                  | 100*                 | 30                  | 260 ± 5 for 5 sec.    | 10                                     | -40~+85  | -40~+100 |

Note: Please take note the Absolute Maximum Rating values. Any operation beyond the specified ratings in this table will result degradation of LED life-span and may cause LED to fail.

## Package Dimension:

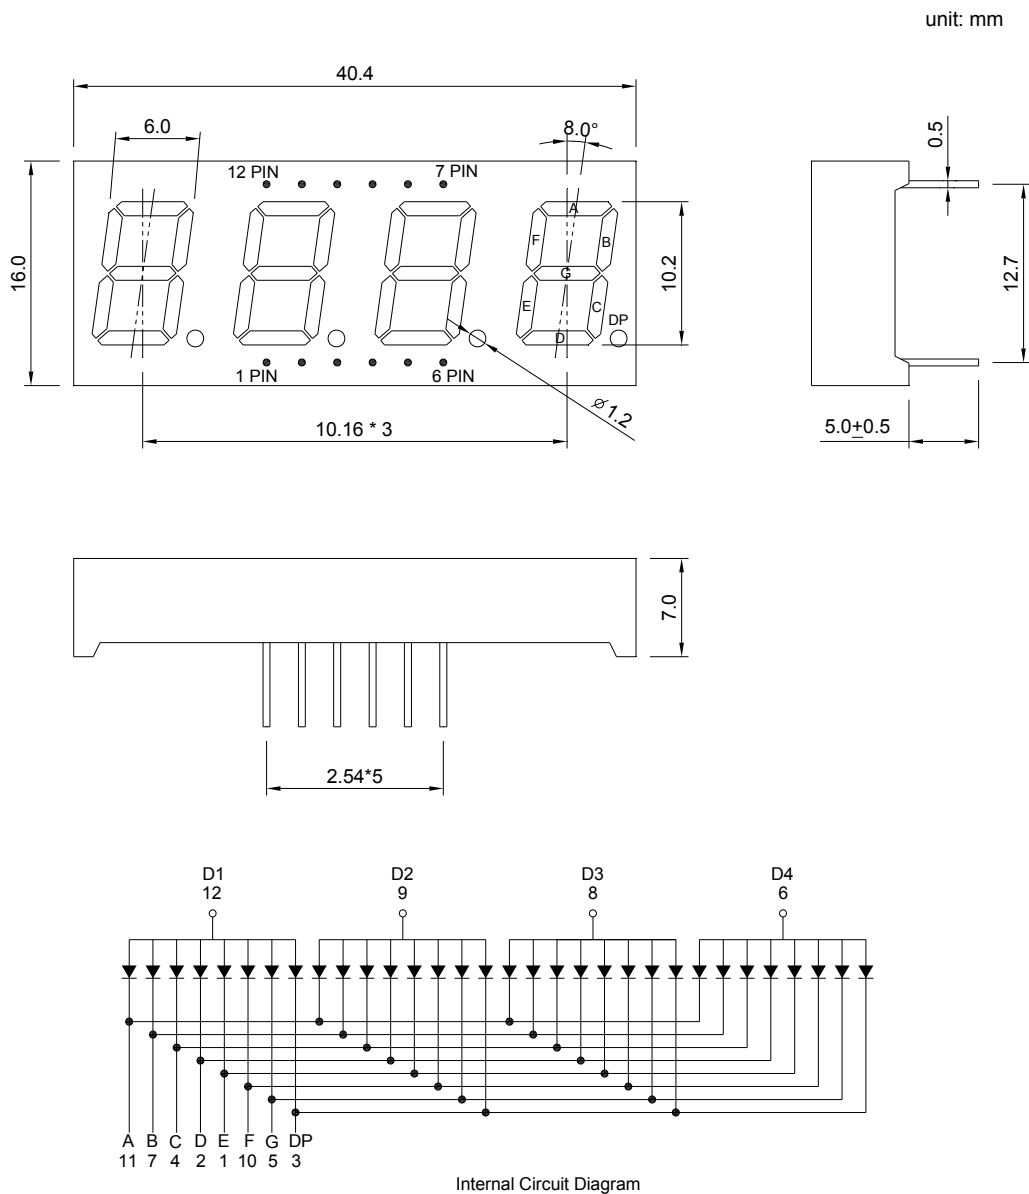

## Notes:

1. All dimensions are millimeters.
2. Dimensional tolerance is  $\pm 0.2\text{mm}$  unless otherwise specified.
3. Specifications are subject to change without notice.