


Semi-lens Silicon Photodiode

OD T467


Features

- High radiant sensitive
- Low junction capacitance
- Wide radiant sensitive area
- Fast respond speed.
- Daylight filter
- Lens in black color



Applications

- Industrial electronics
- Measurement
- Control circuit
- Interrupter




Absolute Maximum Rating $T(amb) = 25^{\circ}C$, unless otherwise specified

Parameter	Symbol	Value	Unit
Reverse Voltage	V_R	32	V
Power Dissipation	P_d	150	mW
Operating Temperature Range	T_{opr}	-25 to + 85	$^{\circ}C$
Storage Temperature	T_{stg}	-40 to + 85	$^{\circ}C$
Soldering Temperature	T_{sol}	260+/-5 3 sec	$^{\circ}C$

Note: Please take note the Absolute Maximum Rating values. Any operation beyond the specified ratings in this table will result degradation of LED life- span and may cause LED to fail.

Package Dimension:

unit: mm

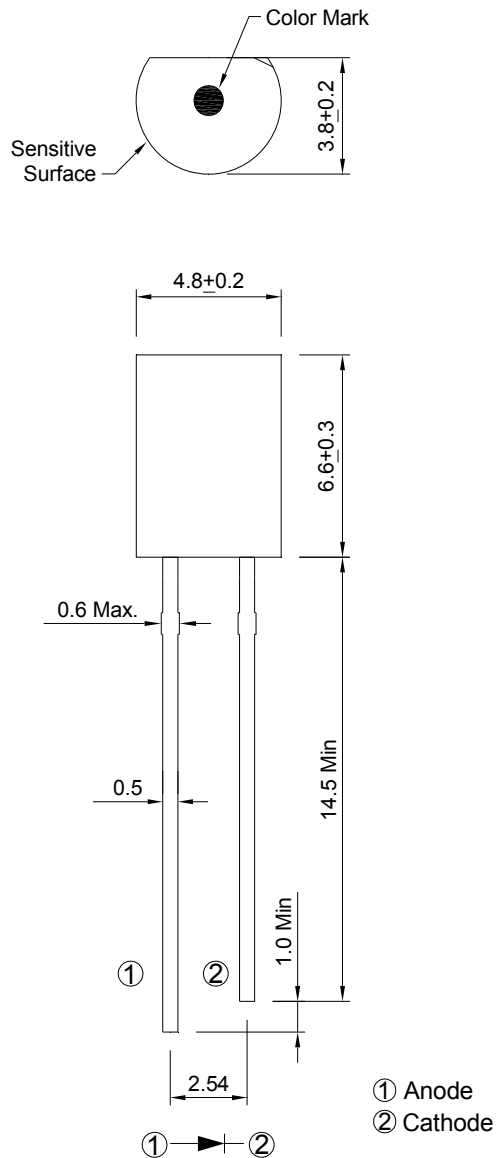

Notes:

1. All dimensions are millimeters.
2. Tolerance is ± 0.2 mm unless otherwise specified.
3. Specifications are subject to change without notice.

Optical Characteristics Tamb=25°C, unless otherwise specified

Parameter	Test condition	Symbol	Min	Typ.	Max	Unit
Open Circuit Voltage	Ee = 5mW/cm ² λ p= 940nm	Voc	---	0.35	---	V
Short Circuit Current		Isc	---	70	---	μA
Dark Current	Ee = 0mW/cm ² VR = 10V	ID	---	5	30	nA
Reverse Light Current	Ee = 5mW/cm ² λ p= 940nm VR = 5V	IL	---	70	---	μA
Total Capacitance	Ee = 0mW/cm ² VR = 3V f=1MHz	Ct	---	25	---	pF
Reverse Breakdown Voltage	Ee = 0mW/cm ² IR=100 μA	BVR	32	170	---	V
Range of Spectral Bandwidth	---	λ 0.5	840	---	1200	nm
Wavelength of Peak Sensitivity	---	λ p	---	980	---	nm
Rise Time	VR=10V, RL=1000Ω	tr	---	50	---	nS
Fall Time		tf	---	50	---	

Optical Characteristics Curves

