


3mm Round Super Bright LED

VT 3228.49H

Description

This high brightness BLUE emitting LEDs are made from the most efficient InGaN technology. Its chip material is of InGaN technology, able to reach a high light output efficiency. These series of LEDs come in moisture resistance water clear lens while offering various viewing angles. Other than Bulk packing, tape and reel is available. Changes in viewing angle, luminous intensity and lens color is acceptable.

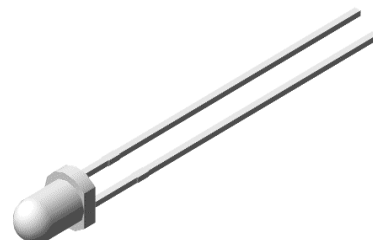


Applications

- Lighting indicator
- Status lights
- ON/OFF indicator
- Backlight illumination



Electronic Optical Characteristics (at 20mA):

Part Number	Emitted Color	λ (nm)		Lens Color	Iv(mcd)		View Angle (2 θ 1/2)	VF(V)	
		λ_d	λ_p		Min.	Typ.		Typ.	Max.
VT 3228.49H	Blue 	470	468	Clear	2240	4500	20	3.2	3.8

Absolute Maximum Ratings (at Ta=25°C)


P _D (mW)	I _{FP} (mA)	I _F (mA)	T _{sol} (°C)	I _R (uA)@V _R =5V	T _{opr} (°C)	T _{stg} (°C)
120	100*	30	260±5 for 5 sec	50	-40~+85	-40+100

Note: Please take note the Absolute Maximum Rating values. Any operation beyond the specified ratings in this table will result degradation of LED life-span and may cause LED to fail.

* I_{FP}: Peak Forward Current under 1/10 duty, 1KHz condition

Package Dimension:

unit: mm

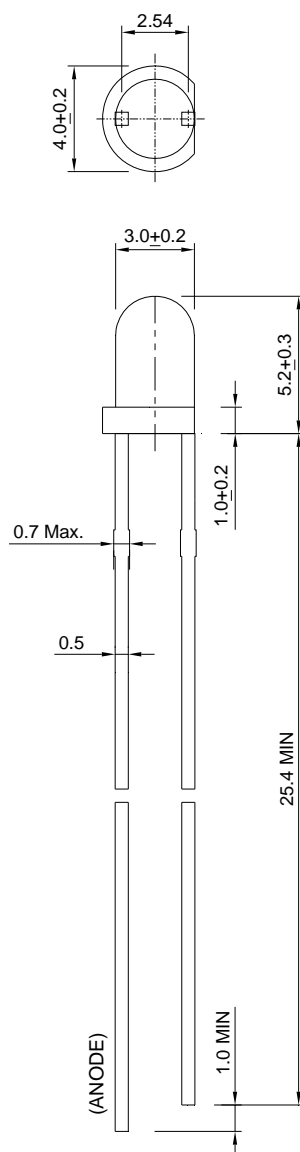

Notes:

1. All dimensions are millimeters.
2. Dimensional tolerance is ± 0.2 mm unless otherwise specified.
3. Epoxy meniscus under flange is 1.5 mm max.
4. Specifications are subject to change without notice.