


5.2mm x 4.6mm Oval LED Lamp

Description

The oval shape LED produced with InGaN technology materials. Other than offering superb reliability, luminous intensity has been increased. This improvement is most suitable for outdoor applications such as outdoor display board, available with color diffused or water clear lens. Other than bulk packing, tape and reel is available. Changes in viewing angle, luminous intensity and lens color is acceptable.

VT 73M6



Features

- Superb viewing angle design
- High luminous intensity with color diffused lens
- · Luminous intensity, color & categorized
- Without Stopper option
- RoHS compliance





Electronic Optical Characteristics (at 20mA):

Part Number	Emitted Color	λ (nm)		Lens	lv(mcd)		View Angle	VF(V)	
Part Number	Emitted Color	λd	λр	Color	Min.	Тур.	(201/2)	Тур.	Max.
VT 73M6	True-green	525	518	Tinted	2240	2900	X:70 Y:40	3.5	3.8

Absolute Maximum Ratings (at Ta=25℃)

P _D (mW)	IPF(mA)	IF(mA)	Tsol(℃)	IR(uA)@V _{R=} 5V	Topr(℃)	Tstg(℃)	
110	100	30	260 ± 5 for 5 sec	50	-40~+85	-40~+100	

Note: Please take note the Absolute Maximum Rating values. Any operation beyond the specified ratings in this table will result degradation of LED life-span and may cause LED to fail.


*IFP: Peak Forward Current under 1/10 duty, 1KHz condition

Version:2.1 Spec: VT 73M6 Page 1 of 2



Package Dimension:

unit: mm

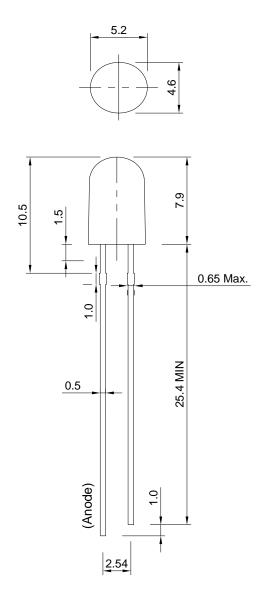

Notes:

- 1. All dimensions are millimeters.
- 2. Tolerance is \pm 0.2mm unless otherwise specified.
- 3. Specifications are subject to change without notice.

Version:2.1 Spec: VT 73M6 Page 2 of 2