

# 4.1mm x 3.0mm Oval LED Lamp

### **Description**

The oval shape LED produced with InGaN technology materials. Other than offering superb reliability, luminous intensity has been increased. This improvement is most suitable for outdoor applications such as outdoor display board, available with color diffused or water clear lens.

**VT 73K6** 

#### **Features**

- Superb viewing angle design
- · High luminous intensity with color diffused lens
- · Luminous intensity, color & categorized
- With Stopper option
- RoHS compliance





## **Electronic Optical Characteristics (at 20mA):**

Part Number	Emitted Color	λ (nm)		Lens	lv(mcd)		View Angle	VF(V)	
Part Number	Emitted Color	λd	λр	Color	Min.	Max.	(201/2)	Min.	Max.
VT 73K6	True-green	525	518	Diffuse	1800	3550	X:110 Y:50	2.8	3.6

## Absolute Maximum Ratings (at Ta=25°C)

P <sub>D</sub> (mW)	IPF(mA)	IF(mA)	Tsol(℃)	IR(uA)@V <sub>R=</sub> 5V	Topr(℃)	Tstg(℃)	
110	100	30	260 ± 5 for 5 sec	50	-40~+85	-40~+100	

Note: Please take note the Absolute Maximum Rating values. Any operation beyond the specified ratings in this table will result degradation of LED life-span and may cause LED to fail.


\*IFP: Peak Forward Current under 1/10 duty, 1KHz condition


Version:2.1 Spec: VT 73K6 Page 1 of 2



## **Package Dimension:**

unit: mm



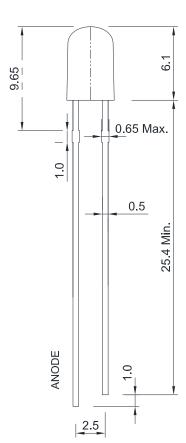

## Notes:

- 1. All dimensions are millimeters.
- 2. Tolerance is  $\pm$  0.2mm unless otherwise specified.
- 3. Specifications are subject to change without notice.

Version:2.1 Spec: VT 73K6 Page 2 of 2