


1206 SMD LED 60 Degree View Angle

VS 6578

Description

This lens construction of this series is different from other Flat type of SMD LED. Within the lens itself, there is an additional lens construction for better focusing of light output. Thus, increase the luminous intensity. Red, Yellow and Green emitting colors are made of high efficiency AlGaInP materials. All above carrying high luminosity under low current condition characteristics.




Applications

- Industrial control systems signal indicator
- Automotive features
- Front panel indicator
- Status indication



Electronic Optical Characteristics (at 20mA):

Part Number	Emitted Color	λ (nm)		Lens Color	Iv(mcd)		View Angle	VF(V)	
		λ_d	λ_p		Min.	Typ.		Typ.	Max.
VS 6578	Green 	573	575	Clear	28	42	60	2.0	2.4

Absolute Maximum Ratings (at Ta=25°C)


P _D (mW)	I _{FP} (mA)	I _F (mA)	Iron Solder (°C)	I _R (uA)@V _R =5V	T _{opr} (°C)	T _{stg} (°C)
60	100*	25	350 ± 5 for 3 sec.	10	-40~+85	-40~+100

Note: Please take note the Absolute Maximum Rating values. Any operation beyond the specify ratings in this table will result degradation of LED life-span and may cause LED to fail.

* I_{FP}: Peak Forward Current under 1/10 duty, 1KHz condition

Package Dimension:






unit:mm

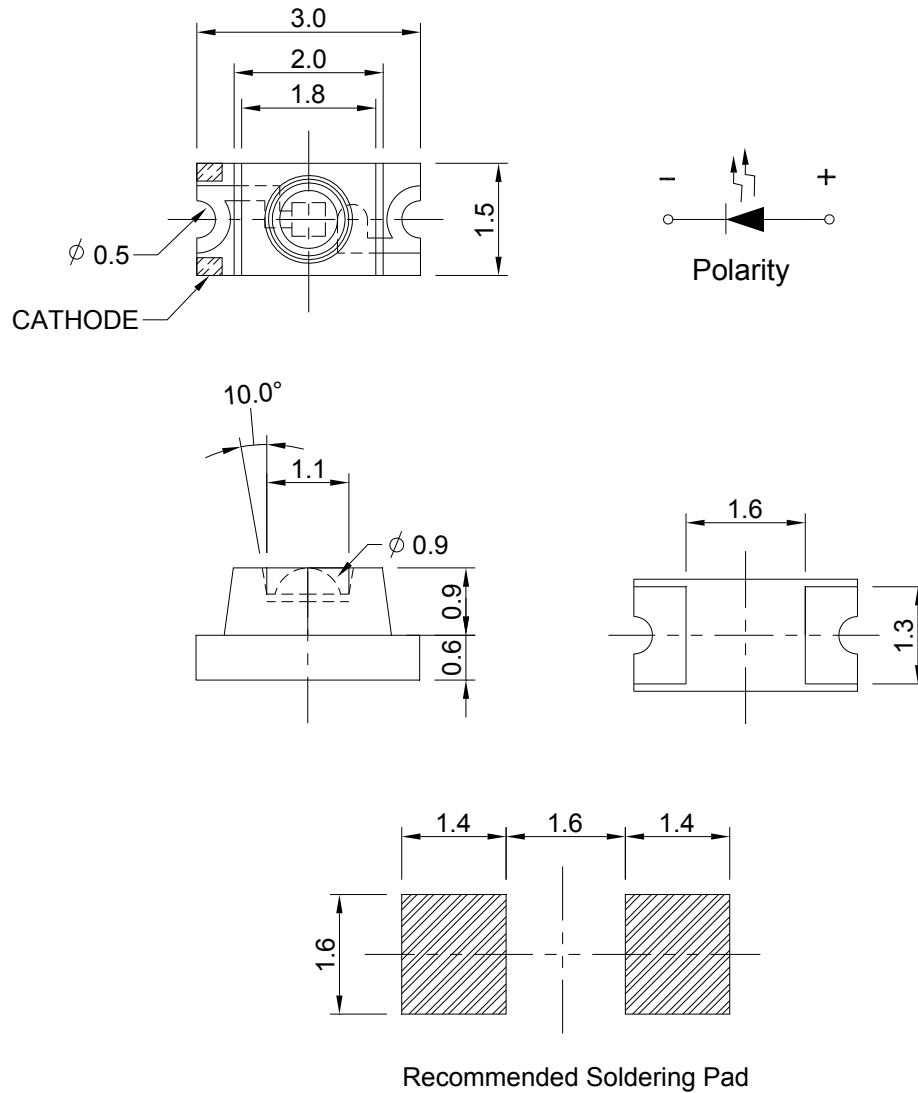


Notes:

1. All dimensions are millimeters.
2. Tolerance is ± 0.2 mm unless otherwise specified.
3. Specifications are subject to change without notice.

Optical Characteristics Curves

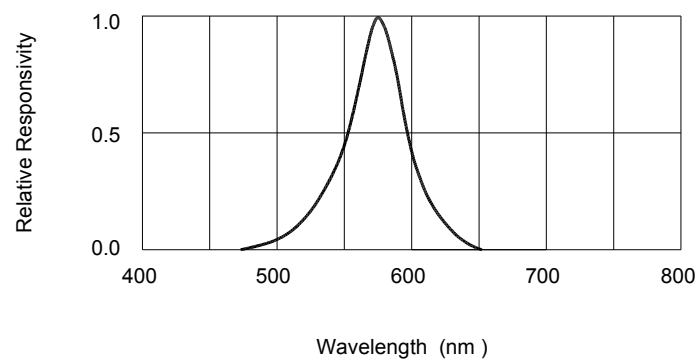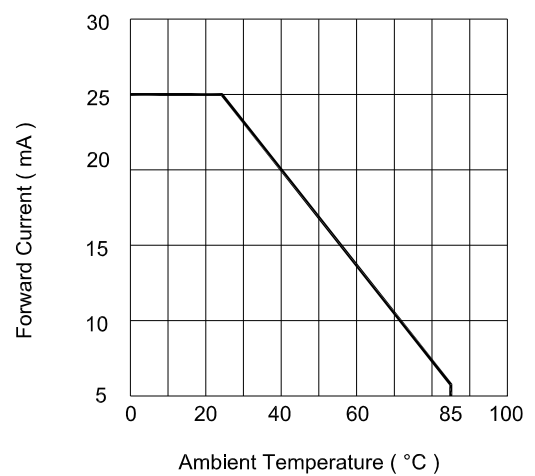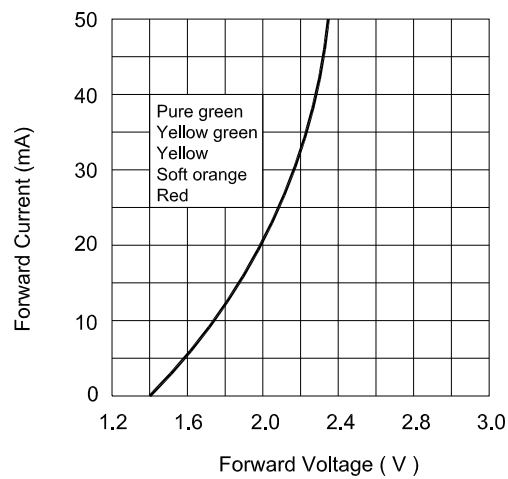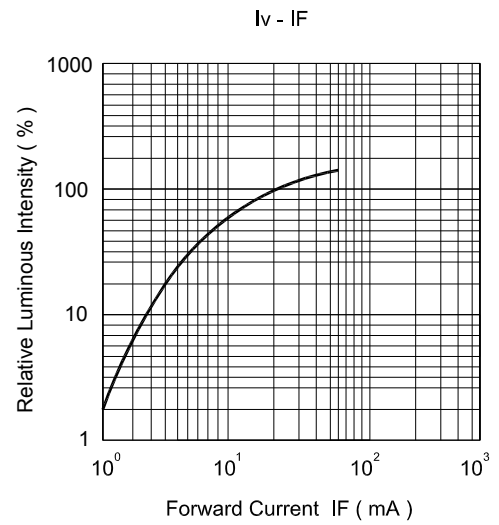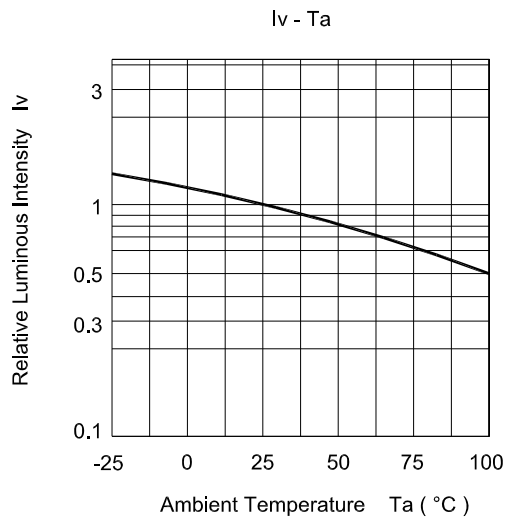


Reel Dimension:

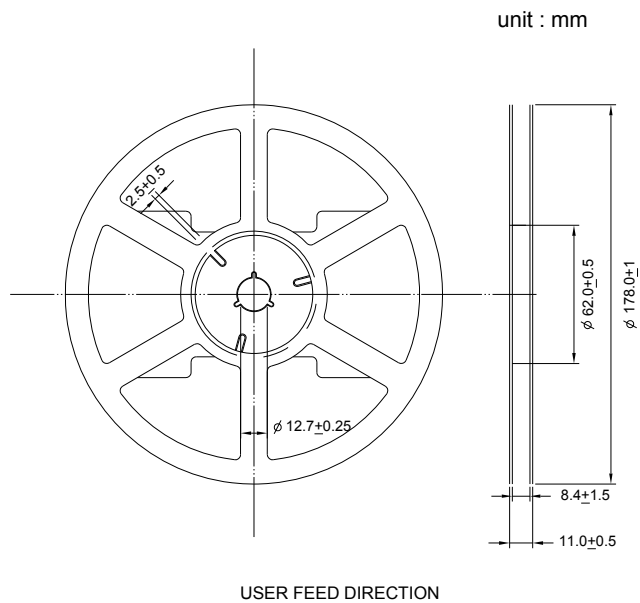

Note:


Available in 8mm carrier tape on 178mm diameter reels. (3,000 pieces)

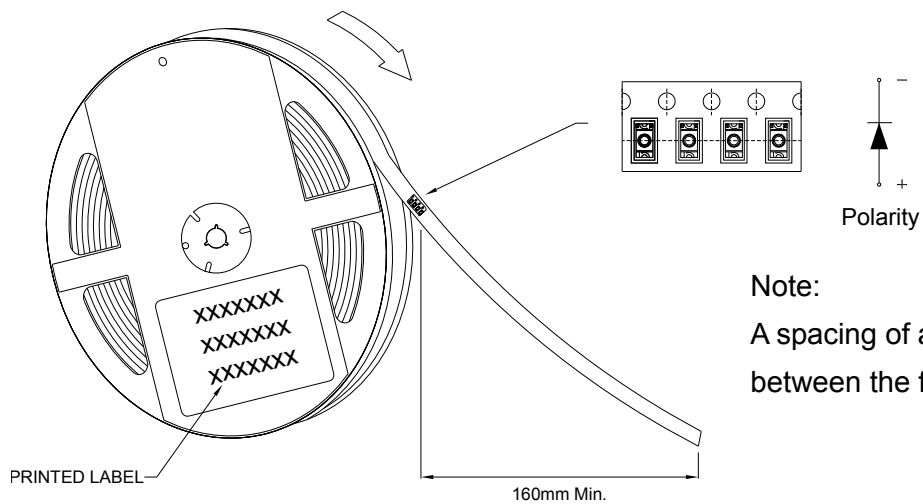


Note:

A spacing of approximately 160mm between the front edge of tape

Tape Dimension:

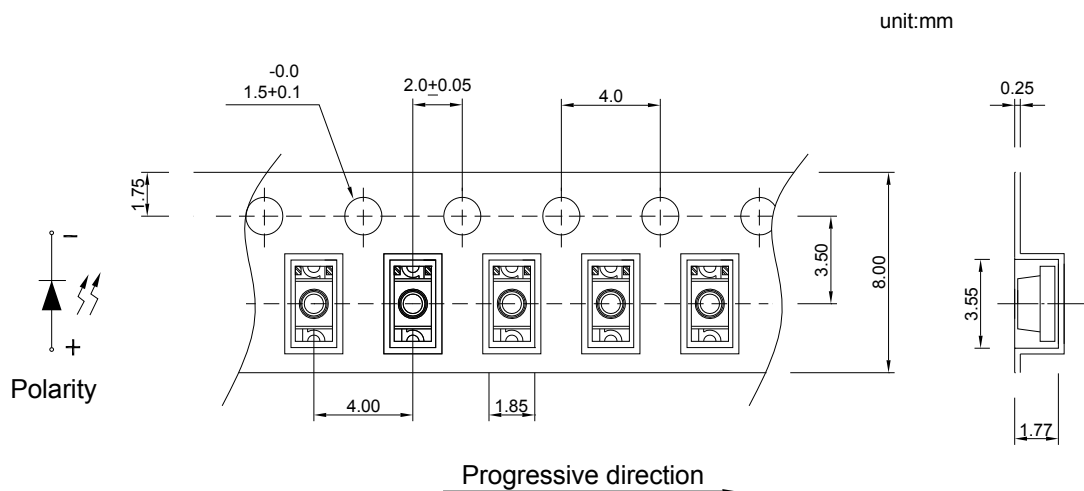

Recommended Pb-free re-flow soldering profile:

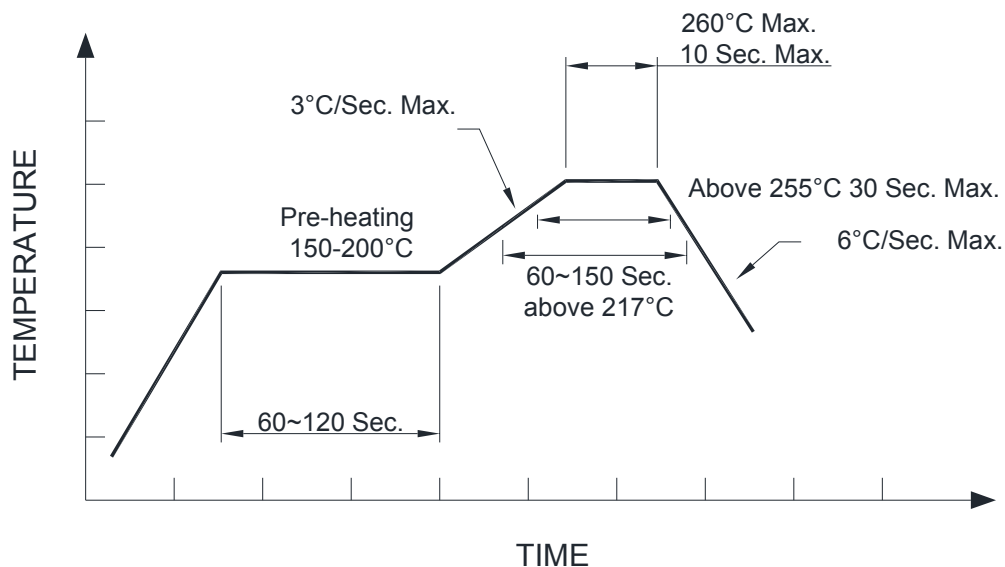

Note:

All the specifications listed in this data sheet are suitable for general electronic equipment, office equipment and communication devices. Kindly consult Sales Representatives for specific reliabilities request, Forward Voltage, Luminous Intensity, Wavelength, Radiant Power or Viewing Angle.